

Large Button Tabletop Master Controls



RadioRA Large Button Tabletop Master Controls provide homeowners with a simple and elegant way to control lights, shades, motorized screens, and many other devices. The Master Controls communicate with the system through radio frequency (RF) and have indicator LEDs to identify the current lighting scene.

Custom engraved, large backlit buttons are easy to read and provide easy location of the Master Control, even in a dark room.

The Large Button Tabletop Master Controls are available in 5, 10, or 15 button versions with Raise/Lower.

Features

- Central control for *RadioRA* local lighting controls to:
 - Toggle a light or group of lights between a preset level and off.
 - Monitor the status of a light or group of lights.
 - Turn all lights on to full.
 - Turn all lights off.
 - Raise and lower room/scene lighting.
- Controls are field-programmable to select whole-house or single-room preset light levels.
- Large backlit buttons are easy to locate and press.
- Indicator LEDs identify current lighting scenes.
- Choice of two power sources: Plug-in DC adapter; Cordless, using AAA batteries.
- Configurable backlight intensity for both battery and adapter power sources.
- Configurable Raise/Lower selection
 - Last button pressed
 - Double-tap button
- Configurable cordless operation:
 - Single button press to “wake up” and activate selected button
 - Single button press to “wake up” and show status of lighting
- One engraved button kit certificate included.

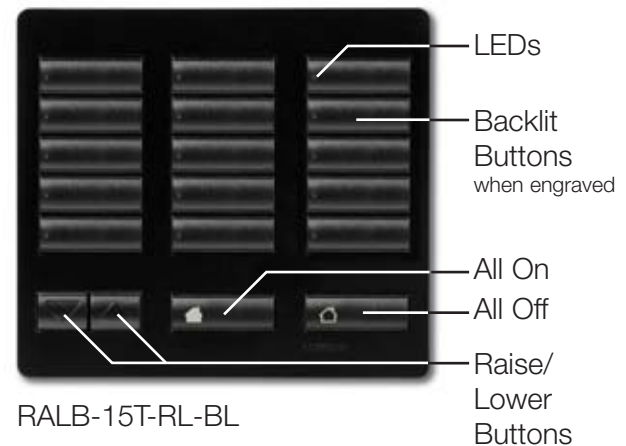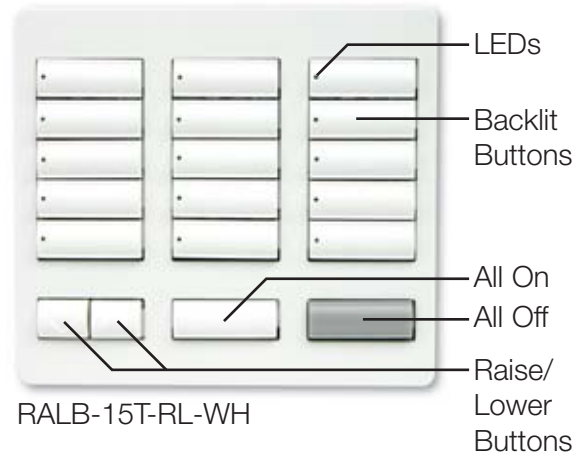

Model Numbers

Large Button Tabletop Master Controls

- RALB-5T-RL-XX** 5 Buttons, Raise/Lower, and All On/All Off
- RALB-10T-RL-XX** 10 Buttons, Raise/Lower, and All On/All Off
- RALB-15T-RL-XX** 15 Buttons, Raise/Lower, and All On/All Off

“XX” in the model number represents color/finish code.

Job Name:	Model Numbers:
Job Number:	

Specifications

Standards

- UL Listed (Adapter) for U.S. and Canada.
- FCC Approved. Complies with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.
- NOM Certified (Adapter).

Power

- DC Adapter Power:
Input Power: 120 V \sim 60 Hz.
Output Power: 9 V \equiv 300 mA.
- Use only the adapter provided by Lutron with the Master Control.
- Battery Power: 2 each 1.5 V “AAA” alkaline batteries.

Key Design Features

- Green LEDs for status and button backlighting.
- Choice of two power sources (plug-in adapter or battery) for maximum flexibility to conveniently locate the Master Control.
- Power failure: should power be interrupted, the lights will return to the level set prior to the interruption. The Large Button Tabletop Master Control will continue to identify which lighting zones are active after power is restored.

- On a single tap the selected room/scene will toggle on/off.
- Configurable backlight intensity:
 - Separate backlight intensity for battery and adapter power sources
 - Select between High, Medium, Low, or Off
- Configurable Raise/Lower selection:
 - Last Button Pressed—lighting zones assigned to the last button pressed are selected for raise/lower
 - Double-tap Button—lighting zones assigned to the double-tapped button are selected for raise/lower
- Configurable “Wake Up” for cordless operation:
 - “Wake Up and Activate”—Single button press will “wake up” and activate selected button.
 - “Wake Up Only”—Single button press will “wake up” and show status of lighting. Subsequent presses while device is “awake” will activate button.

System Communications and Capacity

- Master Controls communicate with the *RadioRA* system through radio frequency (RF).
- Each *RadioRA* Master Control counts toward the single-system maximum of 14 Master Controls (up to 24 with Chronos™ System Bridge and Timeclock).

Environment

- Ambient operating temperature: 0-40 °C, 32-104 °F
- 0-90% humidity, non-condensing.
- Indoor use only.

Warranty


- 1-year Limited Warranty.

Color/Finish Codes




Optional Wall Mounting

Attach mounting bracket to wall using the supplied screws and wall anchors.

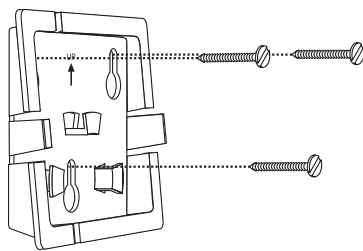

If using the DC adapter power supply, wrap excess power supply cord around the cord holder. Align Tabletop Master Control and snap onto mounting bracket.




Job Name:	Model Numbers:
Job Number:	


Dimensions

Note: All dimensions are in inches (millimeters).


Master Control Front View

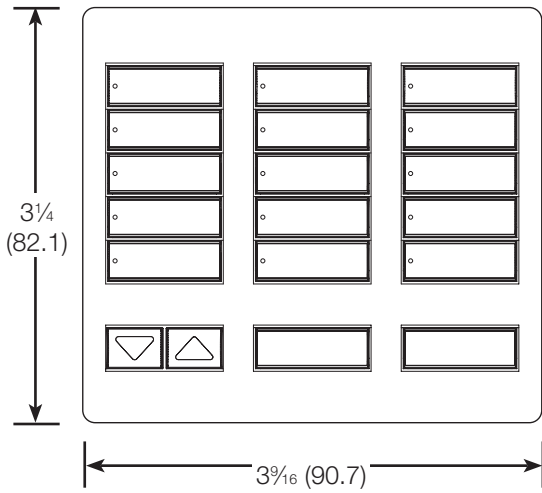


Master Control Side View

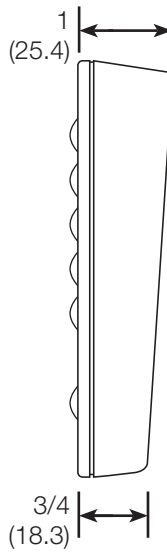


Master Control Top View



Mounting Bracket Front View

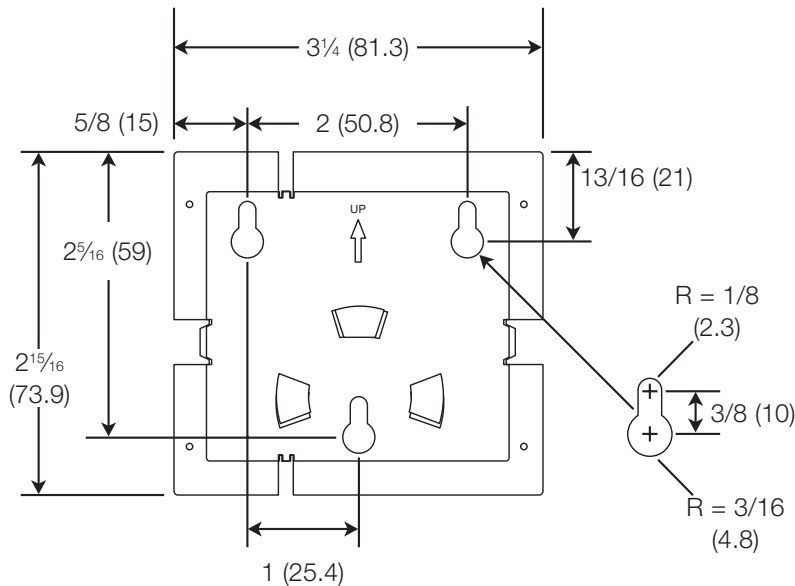


Mounting Bracket Side View

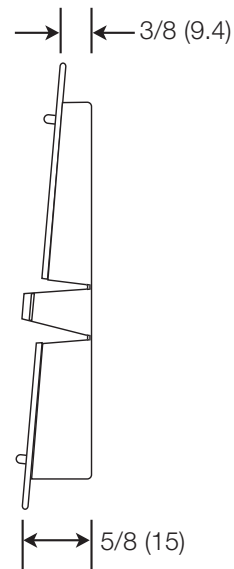

Job Name:	Model Numbers:
Job Number:	

System Overview

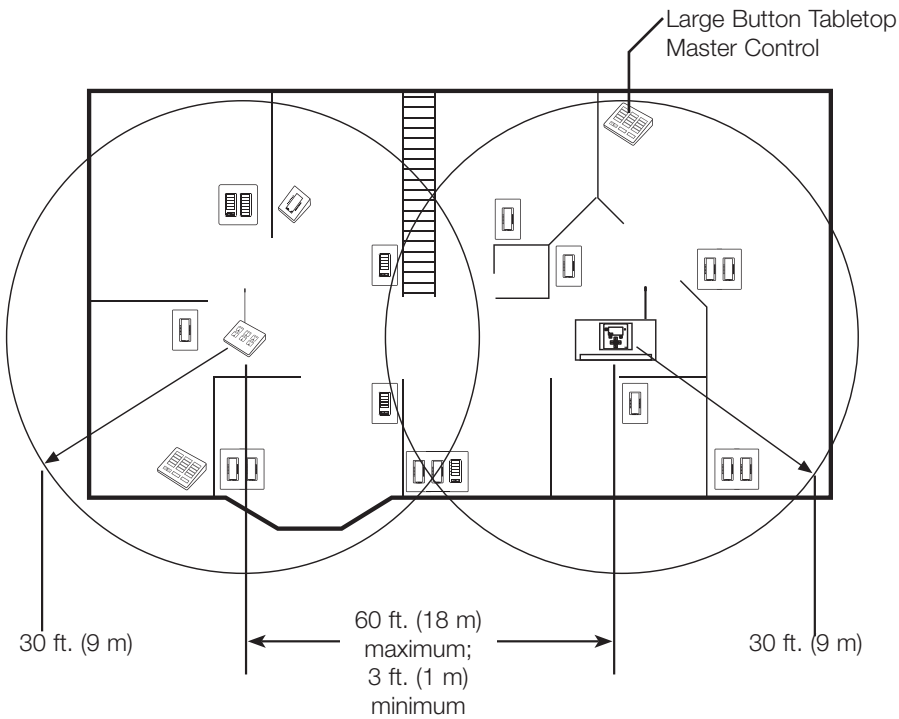

System Communication Notes

- *RadioRA* Lighting Zone Controls and Master Controls must be located within 30 ft. (9 m) of a Repeater or the Chronos® (as a Main Repeater). Multiple repeaters may be necessary to provide adequate coverage.
- Additional repeaters must be within 60 ft. of the *Chronos* (as a Main Repeater) or another repeater.
- *RadioRA* Lighting Zone Controls cannot be controlled and *RadioRA* Master Controls will not function until they are activated and programmed.

Job Name:	Model Numbers:
Job Number:	