


Break Room | New Construction

ASHRAE 90.1-2013

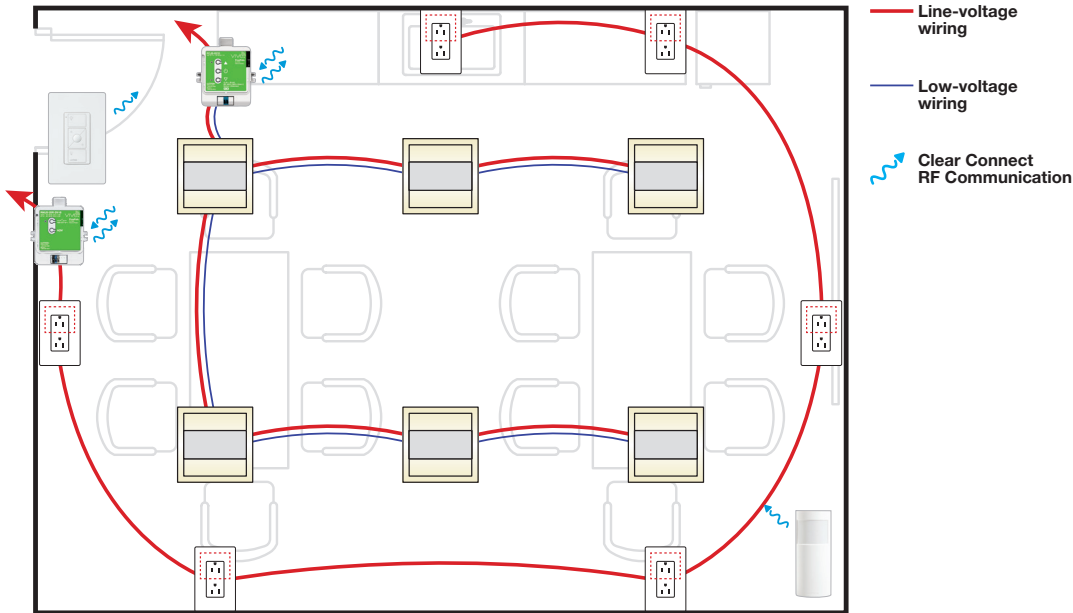

| Symbol | Model Number | Description | Qty |
|--------|------------------|--|-----|
| | RMJS-8T-DV-B | PowPak dimming module with 0-10V | 1 |
| | RMJS-20R-DV-B | 20A PowPak relay module | 1 |
| | LRF2-VKLB-P-WH | Radio Powr Savr wireless corner-mount vacancy sensor | 1 |
| | PJ2-3BRL-GWH-L01 | Pico wireless 3-button with raise/lower control | 1 |
| | PICO-WBX-ADAPT | Pico wallbox adapter | 1 |
| | | | |

Control Functionality

Occupant Enters:

Lights do not automatically turn on when an occupant enters the space; lights must be turned on manually. Maximum light level is set to 80%. Controlled receptacles automatically regain power when occupant enters.

When Occupied:

Manual: Occupant uses wall dimmer to set desired light levels for all lights.

Occupant Exits:

All lights automatically turn off 15 minutes after all occupants exit. 50% of all receptacles automatically turn off 15 minutes after all occupants exit.

Add a Vive wireless hub to enable simple setup and re-zoning, system monitoring, timeclock functionality, and advanced integration.

Code Notes: For break rooms with daylight, include 0-10V dimming module per zone and a daylight sensor. Want to add a Vive wireless hub for more features? Go to lutron.com/vive for complete compatibility and design details. This solution requires 0-10V enabled ballasts and drivers by others.