

RF Keypads (cont.)

Designer *seeTouch*® KEYPADS

Designer-style *seeTouch* keypads feature large, easy-to-use buttons, plus a unique backlit engraving option that makes the keypads readable any time of the day or night. *seeTouch* buttons are rounded, allowing engraving to be displayed at an upward angle, increasing readability. *seeTouch* keypads are available with one to seven buttons, allowing you to customize the number of functions to fit your need. The flexible design even allows the number of buttons and the configuration of the buttons to be changed after the keypad is installed.

Options include configurations with infrared receiver and raise/lower buttons.

COLORS AND FINISHES

Designer-style *seeTouch* keypads are available in Designer Gloss finishes and Satin Colors® Matte finishes. Button color may differ from insert color ordered. Refer to *seeTouch* Ordering Guide (367-571) for details. Also see Appendix F: Colors & Finishes.

ORDERING METHODS

Temporary button labels for *seeTouch* keypads are available in Gray letters (GR) for light colored buttons, or in White letters (WH) for dark colored buttons. Order model number ST-LBL-GR (or WH) for 1 sheet, or model number ST-LBL25-GR (or WH) for a pack of 25 sheets.

a) Engraving will be decided after installation

- 1) Order keypad with buttons. A prepaid engraving certificate is included.
STRD-Model-Color
- 2) After engraving is determined, redeem engraving certificate.
SKD-Model-Color-E

b) Engraving will be decided before installation

- 1) Order keypad without buttons.
Non-IR: STR-NB-NONE
IR: STR-NBIR-NONE
- 2) Order engraved button kit.
SKD-Model-Color-E

***seeTouch* KEYPADS**

1-Button



Keypad*: STRD-1B-XX
Button Kit: SKD-1B-XX-E
Description: 1-button

2-Button



Keypad*: STRD-2B-XX
Button Kit: SKD-2B-XX-E
Description: 2-button

3-Button



Keypad*: STRD-3B-XX
Button Kit: SKD-3B-XX-E
Description: 3-button



Keypad*: STRD-3BRL-XX
Button Kit: SKD-3BRL-XX-E
Description: 3-button with raise/lower

4-Button



Keypad*: STRD-4B-XX
Button Kit: SKD-4B-XX-E
Description: 4-button



Keypad*: STRD-4FS-XX
Button Kit: SKD-4FS-XX-E
Description: 4-button favorite scene



Keypad*: STRD-4S-XX
Button Kit: SKD-4S-XX-E
Description: 4-scene



Keypad*: STRD-4SIR-XX
Button Kit: SKD-4SIR-XX-E
Description: 4-scene with IR receiver

* Claro® Gloss and *Satin Colors* Matte Finishes wallplate sold separately.

XX= Color Code

RF Keypads (cont.)

seeTouch® KEYPADS (cont.)

5-Button



Keypad*: STRD-5B-XX
Button Kit: SKD-5B-XX-E
Description: 5-button



Keypad*: STRD-5FS-XX
Button Kit: SKD-5FS-XX-E
Description: 5-button favorite scene



Keypad*: STRD-5BRL-XX
Button Kit: SKD-5BRL-XX-E
Description: 5-button with raise/lower

6-Button



Keypad*: STRD-6B-XX
Button Kit: SKD-6B-XX-E
Description: 6-button



Keypad*: STRD-6BRL-XX
Button Kit: SKD-6BRL-XX-E
Description: 6-button with raise/lower

7-Button



Keypad*: STRD-7B-XX
Button Kit: SKD-7B-XX-E
Description: 7-button

seeTouch - NO BUTTONS

No-Button



Keypad: STR-NB-NONE
Description: No buttons, no IR receiver



Keypad: STR-NBIR-NONE
Description: No buttons with IR receiver



Keypad: STR-2G-NBIR-NONE
Description: 2-gang, no buttons with IR receiver

* Claro® Gloss and *Satin Colors* Matte Finishes wallplate sold separately.

XX= Color Code

RF Keypads (cont.)

RF Wall-Mounted Keypads

Model Numbers	All RF Wall-Mounted Keypads
Input Voltage	120 V \sim , 50/60 Hz
Regulatory Approvals	UL, CSA, NOM, FCC, IC
Environment	Ambient operating temperature: 0 °C to 40 °C, 32 °F to 104 °F Ambient operating humidity: 0-90% humidity, non-condensing. Indoor use only.
Addressing	Via the HomeWorks [®] software, using unique device serial numbers. Units must be installed prior to addressing. Counts as 1 of the 32 keypad addresses on the Processor.
Diagnostics	LEDs provide diagnostics for troubleshooting.
ESD Protection	Meets or exceeds the IEC 61000-4-2 standard.
Surge Protection	Meets or exceeds ANSI/IEEE standard c62.41.
Mounting	STRD-xx, STR-NB-NONE, STR-NBIR-NONE: 1-gang US wallbox STR-2G-NBIR-NONE: 2-gang US wallbox
Engraving	Engraving of keypads and/or keypad buttons available.
IR Keypads	Compatible with these Lutron IR transmitters: GRX-IT-WH, GRX-8IT-WH, SPS-4IT-RP, SPS-FSIT-RP, SP-HT-WH. See Appendix C: Infrared (IR) Integration.
Shipping Weight	0.3 lbs. (0.1 kg)
Keypad Link LED Count	0 (not applicable since not powered by keypad link)

FRONT ROOM

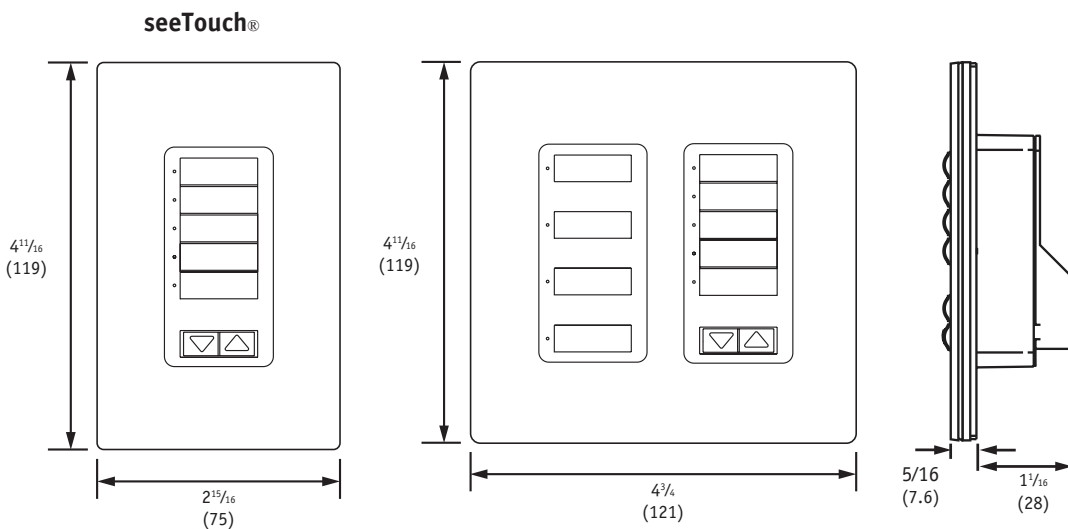


Figure 1 – Dimensions
all dimensions are shown as inches (mm)