

RF Keypads (cont.)

SLIM AND LARGE BUTTON RF TABLETOP KEYPADS

HomeWorks® RF tabletop keypads provide maximum flexibility to locate the devices where the homeowner can conveniently monitor and control lighting, window treatments, and other home systems. Tabletop keypads are ideal for night stands, coffee tables, and kitchen counters. Keypad buttons are programmed to create a customized control that meets the individual needs of each home.

Keypads have LEDs that provide real-time status indication. Custom engraving is available to clearly identify each button's function. RF tabletop keypads can be part of any system design with RF capability.

The RF tabletop keypads are available with Large Button (5-, 6-, 10-, or 15-button) and Slim Button (5-, 10-, or 15-button) configurations. All of these models also include raise/lower buttons. All units are plug-in/battery combo units.

COLORS AND FINISHES

All RF tabletop keypads are available in Midnight (MN) and Snow (SW). Metal faceplates can be ordered separately keypads. See Appendix F: Colors & Finishes.

COMMUNICATION TO PROCESSOR

All RF tabletop keypads must be located within 30 feet (9 m) of an RF processor or a hybrid repeater. Each HomeWorks RF-capable processor can control up to 32 RF keypads. The tabletop keypad counts as one of the 32 RF keypads.

ORDERING METHOD

- 1) Order keypad with buttons/faceplate. Order a Midnight keypad if a metal faceplate will be used. A prepaid engraving certificate is included.
HRT-Model-Color
- 2) After engraving is determined, redeem engraving certificate for engraved faceplate with same number of buttons as control.
HKT-Model-Color-E

LARGE BUTTON

5-Button



Description: 5-button with raise/lower
Keypad: HRT-5S2RL-XX
Faceplate only: LBK-T5RL-XX-E

10-Button



Description: 10-button with raise/lower
Keypad: HRT-10S2RL-XX
Faceplate only: LBK-T10RL-XX-E

15-Button



Description: 15-button with raise/lower
Keypad: HRT-15S2RL-XX
Faceplate only: LBK-T15RL-XX-E

6-Button



Description: 6-button with raise/lower
Keypad: HRT-6LRL-C-XX
Faceplate only: HKT-6LRL-XX-E

SLIM BUTTON

5-Button



Description: 5-button with master on/off and raise/lower
Keypad: HRT-5RL-C-XX
Faceplate only: HKT-5RL-XX-E

10-Button



Description: 10-button with master on/off and raise/lower
Keypad: HRT-10RL-C-XX
Faceplate only: HKT-10RL-XX-E

15-Button



Description: 15-button with master on/off and raise/lower
Keypad: HRT-15RL-C-XX
Faceplate only: HKT-15RL-XX-E

XX= Color Code

RF Keypads (cont.)

Model Numbers	All RF Tabletop Keypads.
Input Voltage	120 V \sim , 60 Hz (with plug-in 9 V \equiv transformer). 3 V \equiv (with two AAA batteries).
Regulatory Approvals	Plug-in low-voltage transformer: UL Listed for US and Canada, NOM; Keypads: FCC, IC
Environment	Ambient operating temperature: 0 °C to 40 °C, 32 °F to 104 °F Ambient operating humidity: 0-90% humidity, non-condensing. Indoor use only.
Addressing	Via the HomeWorks [®] software, using unique device serial numbers. Units must be installed prior to addressing. Counts as 1 of the 32 RF keypad addresses on a processor.
Diagnostics	LEDs provide diagnostics for troubleshooting.
ESD Protection	Meets or exceeds the IEC 61000-4-2 standard.
Surge Protection	Meets or exceeds ANSI/IEEE standard c62.41.
Dimensions	See Fig. 1, below.
Mounting	Units powered by plug-in transformer must be located within 5 feet (1.5 m) of a 120 V \sim receptacle. Unit must be placed within 30 feet (9 m) of an RF Processor or a Hybrid Repeater.
Shipping Weight	0.3 lbs. (0.1 kg)
Keypad Link LED Count	0 (not applicable since not powered by keypad link)

FRONT ROOM

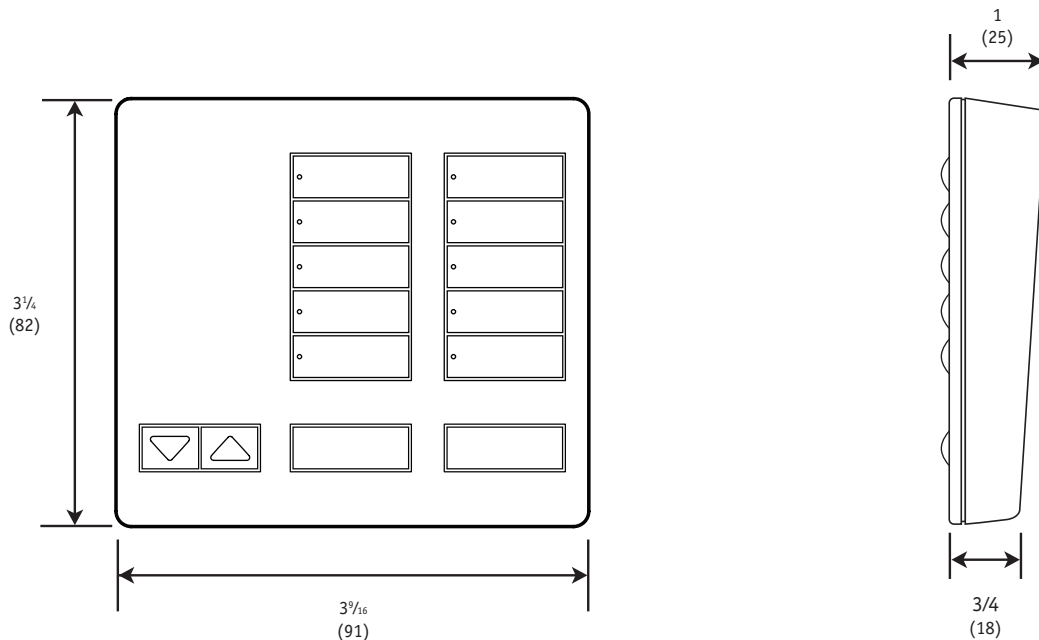


Figure 1 – Dimensions
[all dimensions are shown as inches (mm)]
Large Button Model shown - dimensions for all Tabletop Keypads are identical