

UK switched socket



Schuko socket

General specifications:

- Full line of wiring devices
- Plastic and metal finishes available to coordinate with Lutron controls
- 220 - 250 VAC, 50/60 Hz
- Compliant with all applicable IEC (CE) and BSI standards
- Gang framed versions with Lutron Rania® and Lyneo™ Wallbox dimmers

Special features:

- Sockets with child protection
- Customisable 1- 2-port frame with snap in connectors: RJ11, RJ45, BNC jack etc.
- Screwless faceplates
- Durable polycarbonate plastic faceplates
- Precise colour consistency
- UV stable colour

French (type E) socket



RN-RE16-X-IYY-Z

16 A, 250 V~
(WxHxD) 86.1 x 86.1 x 30.7mm


Schuko (type F) socket



RN-RS16-X-IYY-Z

16 A, 250 V~
(WxHxD) 86.1 x 86.1 x 32mm


UK switched socket

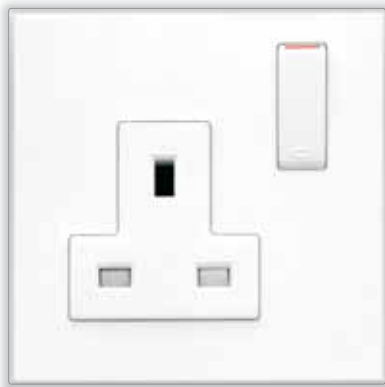

RN-SRSU-X-FYYZ

13 A, 250 V~
(WxHxD) 86.1 x 86.1 x 20.6mm


Twin UK switched socket

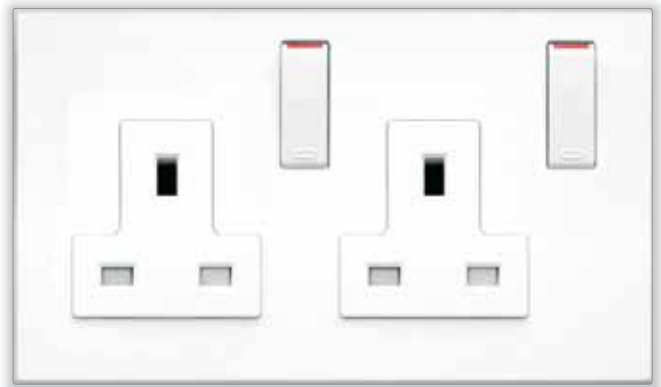

RN-DRSU-X-FYYZ

2 x 13 A, 250 V~
(WxHxD) 146.1 x 86.1 x 27.5mm

UK round pin socket

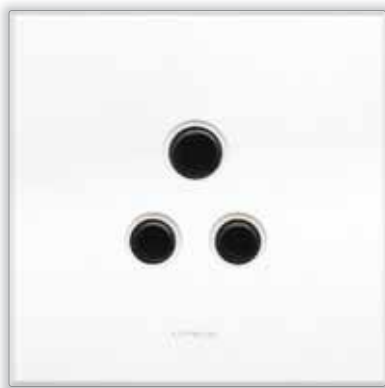

RN-5AUK-X-FYY-Z

5 A, 250 V~
(WxHxD) 86.1 x 86.1 x 19mm

RJ-11 phone jack Cat 3



RN-RJ11-X-FYY-Z
(WxHxD) 86.1 x 86.1 x 26mm

RJ-11 phone jack Cat 3



RN-RJ11-X-IYY-Z
(WxHxD) 86.1 x 86.1 x 26mm

RJ-45 network jack Cat 5e




RN-RJ45-X-FYY-Z
(WxHxD) 86.1 x 86.1 x 26mm

RJ-45 network jack Cat 5e



RN-RJ45-X-IYY-Z
(WxHxD) 86.1 x 86.1 x 26mm

UK phone jack

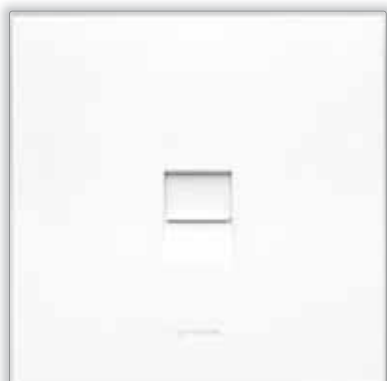

RN-UKPJ-X-FYY-Z
(WxHxD) 86.1 x 86.1 x 12.5mm

French phone jack



RN-FRPJ-X-IYY-Z
(WxHxD) 86.1 x 86.1 x 17.2mm

Sat jack



RN-TF75-X-FYY-Z

Type F, 75-Ohm
(WxHxD) 86.1 x 86.1 x 11mm

Sat jack



RN-TF75-X-IYY-Z

Type F, 75-Ohm
(WxHxD) 86.1 x 86.1 x 11mm

Triplexer – terminated



RN-TRI1-X-IYY-Z

5-2300 MHz, Loss \leq 4 dB
(WxHxD) 86.1 x 86.1 x 21mm


Triplexer – intermediate



RN-TRI2-X-IYY-Z

5-2300 MHz, Loss \leq 7 dB
(WxHxD) 86.1 x 86.1 x 21mm

Blank faceplate

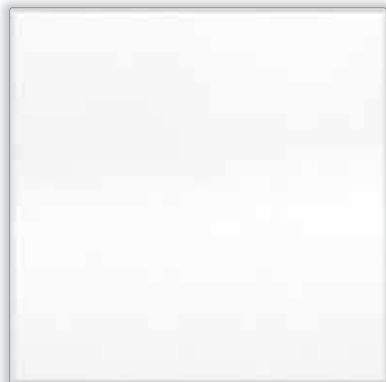

RN-BLFP-X-FYY-Z

(WxH) 86.1 x 86.1

Blank faceplate



RN-BLFP-X-IYY-Z

(WxH) 86.1 x 86.1

Lutron® | 1- 2-port frames and connectors

1-port frame



RN-1PFR-X-FYY-Z

(WxHxD) 86.1 x 86.1 x 11.0mm

1-port frame



RN-1PFR-X-IYY-Z

(WxHxD) 86.1 x 86.1 x 11.0mm

2-port frame



RN-2PFR-X-FYY-Z

(WxHxD) 86.1 x 86.1 x 4.0mm

2-port frame



RN-2PFR-X-IYY-Z

(WxHxD) 86.1 x 86.1 x 4.0mm

Use the 2-port frame/1-port frame with any snap connectors

Port frame	Depth of frame		
	RJ11/RJ45 connector	Coax cable F-style connector	Cable outlet module
RN-2PFR-X-FYY-Z	26mm	11mm	18mm
RN-1PFR-X-FYY-Z	26mm	11mm	18mm



RJ-11 connector

Item Number	Colour
CON-1P-C3-WH	White
CON-1P-C3-BL	Black



RJ-45 connector Cat 5e

Item Number	Colour
CON-1P-C5E-WH	White
CON-1P-C5E-BL	Black



RJ-45 connector Cat 6

Item Number	Colour
CON-1P-C6-WH	White
CON-1P-C6-BL	Black



Coax cable connector F-style, 75 Ohm

Item Number	Colour
CON-1C-WH	White
CON-1C-BL	Black



BNC jack 50 Ohm, BNC

Item Number	Colour
CON-1B-WH	White
CON-1B-BL	Black



MT-RJ fibre jack

Item Number	Colour
CON-1F-MTRJ-WH	White
CON-1F-MTRJ-BL	Black



SC simplex fibre jack

Item Number	Colour
CON-1F-SC-WH	White
CON-1F-SC-BL	Black



LC fibre jack Non-flush mount

Item Number	Colour
CON-1F-LC-WH	White
CON-1F-LC-BL	Black



ST fibre jack

Item Number	Colour
CON-1F-ST-WH	White
CON-1F-ST-BL	Black



Cable outlet module
Cable outer diameter range 1.8 to 8mm

Item Number	Colour
CON-COTL-WH	White
CON-COTL-BL	Black

Single switch




RN-SS10-X-FYY-Z
2-way, 10 AX 250 V~
(WxHxD) 86.1 x 86.1 x 20.5mm

Single switch




RN-SS10-X-IYY-Z
2-way, 10 AX 250 V~
(WxHxD) 86.1 x 86.1 x 20.5mm

Dual switch

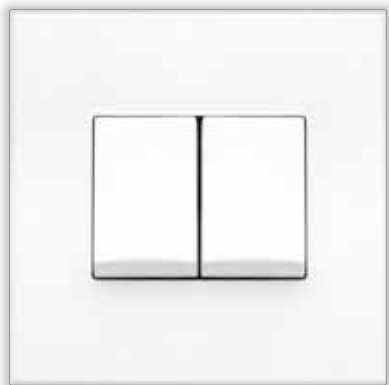

RN-DS10-X-FYY-Z
2-way, 2 x 10 AX 250 V~
(WxHxD) 86.1 x 86.1 x 20.5mm

Dual switch

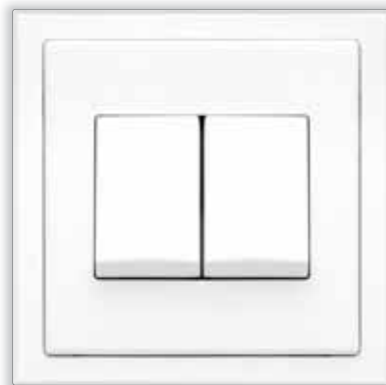

RN-DS10-X-IYY-Z
2-way, 2 x 10 AX 250 V~
(WxHxD) 86.1 x 86.1 x 20.5mm

Intermediate switch



RN-IS10-X-FYYZ

Intermediate, 10 AX 250 V~
(WxHxD) 86.1 x 86.1 x 23.6mm

Intermediate switch



RN-IS10-X-IYY-Z

Intermediate, 10 AX 250 V~
(WxHxD) 86.1 x 86.1 x 23.6mm


Dual intermediate switch



CPW0732-FYY

2 x 10 AX 250 V~
(WxHxD) 86.1 x 86.1 x 23.6mm

Dual intermediate switch

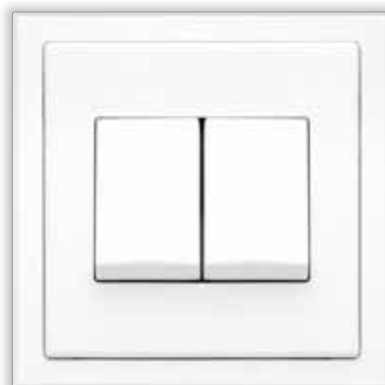

CPW0732-IYY

2 x 10 AX 250 V~
(WxHxD) 86.1 x 86.1 x 23.6mm

Single momentary switch




CPW0854-FYY

10 AX 250 V~

For use with step/impulse relay
(WxHxD) 86.1 x 86.1 x 22.0mm

Starting July 1, 2008, use
RN-SM10-X-FYY-Z

Single momentary switch

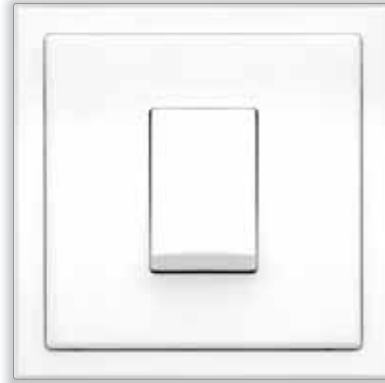

CPW0854-IYY

10 AX 250 V~

For use with step/impulse relay
(WxHxD) 86.1 x 86.1 x 22.0mm

Starting July 1, 2008, use
RN-SM10-X-IYY-Z

Dual momentary switch




CPW0855-FYY

2 x 10 AX 250 V~

For use with step/impulse relay
(WxHxD) 86.1 x 86.1 x 22.0mm

Starting July 1, 2008, use
RN-DM10-X-FYY-Z

Dual momentary switch

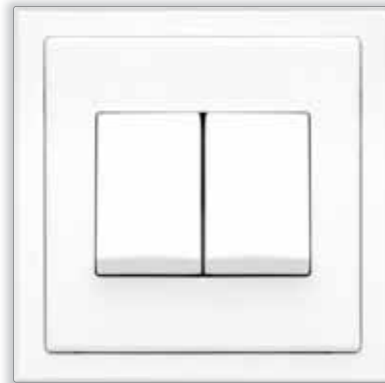

CPW0855-IYY

2 x 10 AX 250 V~

For use with step/impulse relay
(WxHxD) 86.1 x 86.1 x 22.0mm

Starting July 1, 2008, use
RN-DM10-X-IYY-Z

Shutter R/L switch



CPW0856-FYY

10 A 250 V~

(WxHxD) 86.1 x 86.1 x 23.6mm

Shutter R/L switch




CPW0856-IYY

10 A 250 V~

(WxHxD) 86.1 x 86.1 x 23.6mm

1-gang frame

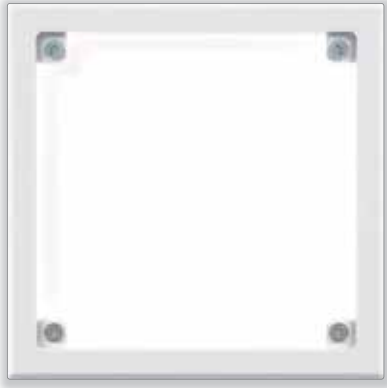


RN-1GANG-X-YY-Z
(WxH) 86.1 x 86.1

2-gang frame



RN-2GANG-X-YY-Z
(WxH) 157.1 x 86.1

3-gang frame

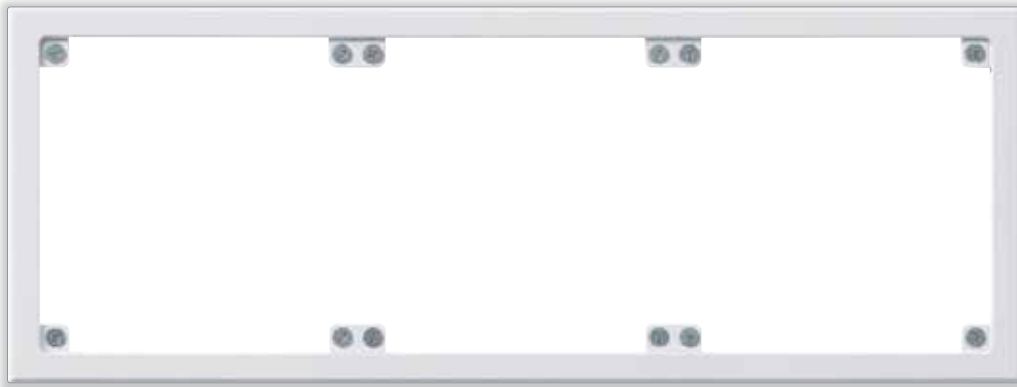

RN-3GANG-X-YY-Z
(WxH) 228.1 x 86.1

Trim ring



• available in Arctic White, Argentum, Mica and Black only


RN-TRRG-X-YY-Z
(WxHxD) 86.1 x 86.1 x 13.1mm

Trim ring compatibility chart		UK backbox depth	
Item	Description	16mm	25mm
LSSI-501	Lyneo STO	✗	✓
LSDI-251	Lyneo dual STO	✗	✓
LNSI-502	Lyneo preset	✗	✓
LLSI-502	Lyneo preset with status light	✗	✓
LLSM-502	Lyneo preset with status light	✗	✓
LLDI-252	Lyneo dual preset with status light	✗	✓
RNSU-452	Rania digital dimmer	✓	✓
RNDU-252	Rania dual digital dimmer	✗	✓
RDSU-452	Rania accessory dimmer	✓	✓
RDDU-252	Rania dual accessory dimmer	✗	✓
RISU-452	Rania IR remote control digital dimmer	✓	✓
RIDU-252	Rania IR dual remote control digital dimmer	✗	✓
RN-SS10	Single switch	✓	✓
RN-DS10	Dual switch	✓	✓
RN-IS10	Intermediate switch	✓	✓

STO = Slide to Off ✓ = Compatible ✗ = Not compatible


how to build a model number

RN-SS10-X-SYY-Z

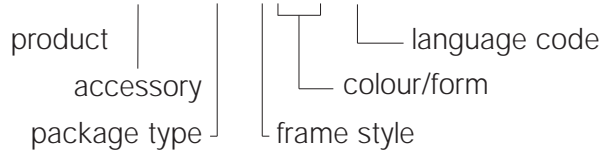

Example:

RN-SS10-B-FAW-M

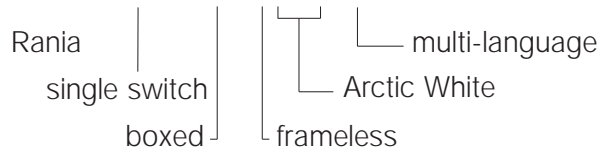

X = Package type

B = Boxes

H = Hanging clamshell

YY = Colour/finish

AW = Arctic White

AR = Argentum

MC = Mica

SN = Satin Nickel

SB = Satin Brass

SC = Satin Chrome

BN = Bright Nickel

BB = Bright Brass

BC = Bright Chrome

AU = Gold Plated

QB = Antique Brass

QZ = Antique Bronze

S = Frame style

F = Frameless

I = Metal frame/metal insert

B = Black frame/metal insert

Z = Language code

For boxes select:

M = Multi-language


For hanging clamshells:

E = English

S = Spanish/French/Portuguese

C = Chinese

dimensions

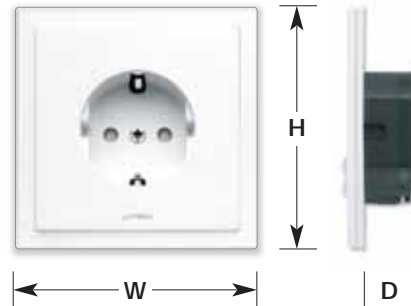

colour options



Arctic
White (AW)

Argentum
(AR)

Mica (MC)

Metals



Satin
Nickel (SN)

Satin
Brass (SB)

Satin
Chrome (SC)



Bright
Nickel (BN)

Bright
Brass (BB)

Bright
Chrome (BC)



Gold Plated
(AU)

Antique
Brass (QB)

Antique
Bronze (QZ)

Other colours and finishes available upon request.

 **LUTRON**
LIGHTING CONTROLS

Lutron Electronics Co., Inc.

©06/2008 Lutron Electronics Co., Inc.

www.lutron.com/europe

www.lutron.com/asia

P/N 367-1320/EA REV B