

Finiré LED Recessed Downlights

Guaranteed LED compatibility standard with high-quality 1% Lutron dimming




CE Certified Recessed Downlight

- New! Trimless and wallwash options available
- Round/square fixtures with fixed/tilt options
- Ecosystem or DALI option digitally allows individual fixture control
- Standard with 93 CRI LEDs and smooth, flicker-free 1% dimming
- 10 year limited warranty



Fixture Types and Options

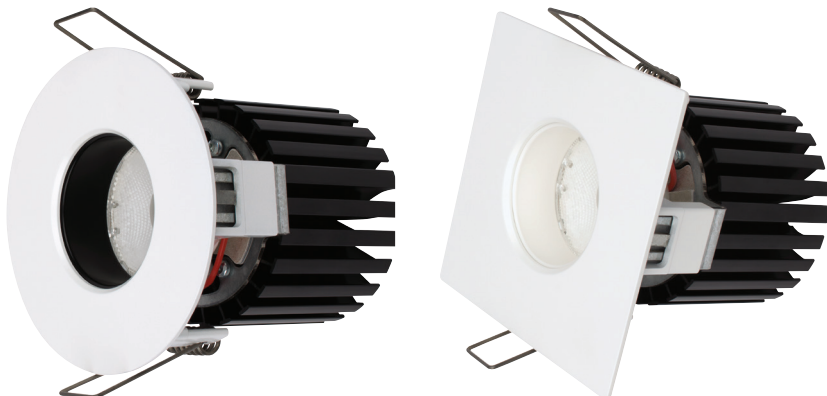

Finiré fixtures come standard with high-quality 93 CRI LEDs and the new Lutron 1% dimming driver that guarantees Lutron control compatibility. A range of new features makes this family ideal for high-end residential applications.

Fixture Types and Options

| | |
|--------------------------|---|
| Type | Fixed, Tilt (25°) |
| Size (bezel) | 95mm |
| Shape | Round, Square |
| LED Type | 12W |
| Color Temperature | 2700K, 3000K, 3500K |
| Beam Spread | 12°, 26°, 51°, Wall Wash |
| Trim | Round Standard, Round Trimless, Square Standard, Square Trimless |
| Control Method | EcoSystem/DALI compatible Hi-lume 1% LED Driver, 220-240V~ |
| Options | IP20 (standard) IP65 |

Finiré Specifications


LED Performance

| | |
|-------------------------------|----------------------|
| Finiré Model | Standard |
| CRI (Typical) | 93 |
| Lumens (Delivered) | 800 |
| Wattage | 12 (includes driver) |
| Efficacy (Lumens/Watt) | >60 |

Independent measurement of typical 3000K downlight fixture models by Lutron Electronics Co., Inc. for reference only. See the Finiré specification sheets for LM79 photometric data by fixture type and trim options.

Meets or exceeds Energy Efficiency Index (EEI) for Ecodesign Directive within the current European Union regulation¹ and also meets Part L building regulations.

¹ EU Regulation 1194/2012, phase 3; Ecodesign Directive 2009/125/EC

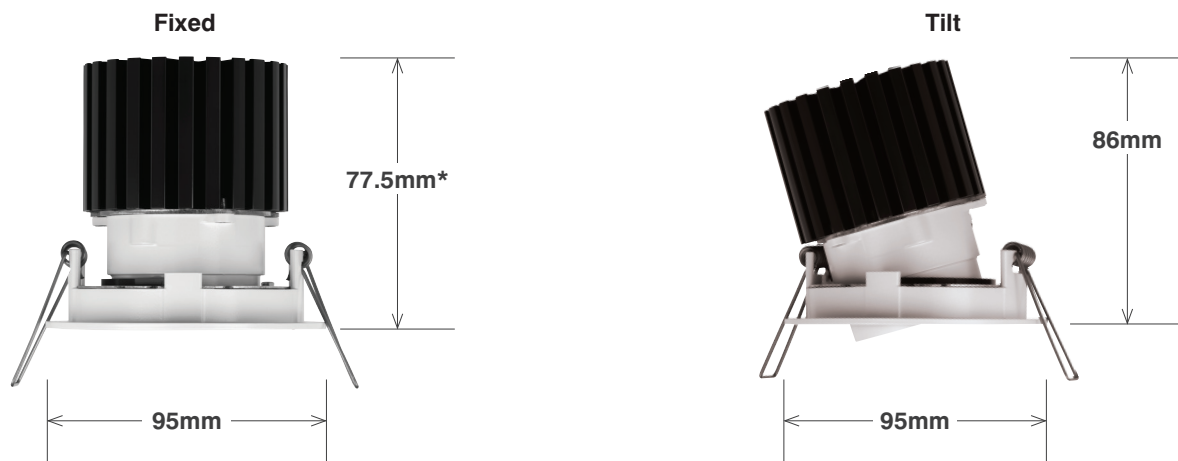

* IP65 option height is 80.5mm

Dimensions

| | Fixed | Tilt |
|-----------------------------------|--|-------------------|
| Dimensions | 95mm(W) x 77.5mm(H) 95mm(W) x 80.5mm(H) - IP65 option | 95mm(W) x 86mm(H) |
| Minimum Ceiling Void Depth | 95mm | 95mm |
| Ceiling Cutout | 86mm | 86mm |
| Rotation | N/A | 360° |
| Tilt | N/A | 25° |

Compatible Controls

Compatible with all Lutron Ecosystem and DALI controls. See lutron.com/europe for details.

How to specify

FRF9 X X 27 12 WH EU XX
1 2 3 4 5 6 7 8

Fixture Options

- 1 Family**
FRF9 = Finiré Round Fixed 95 mm bezel
FRT9 = Finiré Round Tilt 95 mm bezel
FSF9 = Finiré Square Fixed 95 mm bezel
FST9 = Finiré Square Tilt 95 mm bezel

- 2 Output**
X = Standard (800lm)

- 3 Trim Type**
X = Standard
Z = Trimless

- 4 Color Temp**
27 = 2700K
30 = 3000K
35 = 3500K

- 5 Beam**
12 = 12°
26 = 26°
51 = 51°
WW¹ = Wall Wash

- 6 Finish**
WH = White
WB = White With Black Baffle

- 7 Control Option**
EU = EcoSystem/DALI

- 8 Option**
XX = IP20
I6² = IP65

¹ Tilt options only. White Baffle only.

² Fixed option only.

For custom colours and options, please contact
eacustsvc@lutron.com.

lutron.com/cefinire

Lutron EA Ltd., 6 Sovereign Close, London E1W 3JF, UK

Customer Assistance

TEL: +44 (0)20 7680 4481

eatechnicalsupport@lutron.com

lutron.com/help (24/7 Technical Support)

© 04/2017 Lutron Electronics Co., Inc. | Printed in the UK | P/N 367-2166/EA REV D

LUTRON, Lutron, EcoSystem, Finiré, and Hi-lume are trademarks of Lutron Electronics Co., Inc., registered in the U.S. and other countries.



MADE IN THE UK