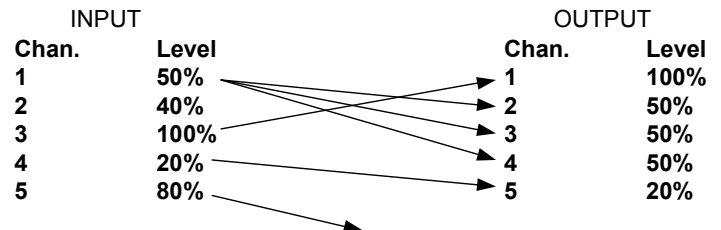


**DMX512 Single Universe Patch**Technical Data Sheet  
Model Porta-Patch

The Porta-Patch unit solves the problem of patching or remapping individual DMX512 channels following the console. In some circumstances it is not always possible or desirable to change the console patch. With Porta-Patch you can assign a single console channel to control many or a signal output channel.

**SPECIFICATIONS**

Baud Rate	250 Kilobaud
Input Circuit	EIA-485 receiver with 120 ohm termination between +data and -data
Input Connectors	Gold plated 5 pin male (Neutrik D1 series)
Output Circuit	EIA-485 driver
Output Connector	Gold plated 5 pin female (Neutrik D1 series)
Input to Output Delay	1/100 second average 1/50 second maximum
Power Input	100 - 120 volts, 50/60 hertz, 12 watts (208 - 240 volt optional)
Power Cord	Five foot attached 18/3 cord with parallel blade w/ ground plug.
Color:	Front, Top, Bottom: Black Back, Sides: Silver Hammertone
Size and Weight	1.6" deep, 5.5" high, 8.2" wide, 5 pounds

\*All specifications meet or exceed DMX512 requirements

MANUFACTURER MEMBER

**ESTA**ENTERTAINMENT SERVICES &  
TECHNOLOGY ASSOCIATION**Doug Fleenor Design, Inc.**

396 Corbett Canyon Road  
 Arroyo Grande, CA 93420  
 (805) 481-9599 voice and FAX  
 (888) 4-DMX512 toll free (888) 436-9512  
 web site: <http://www.dfd.com>  
 e-mail: [info@dfd.com](mailto:info@dfd.com)