


# RadioTouch Large Button Wallbox Transmitter

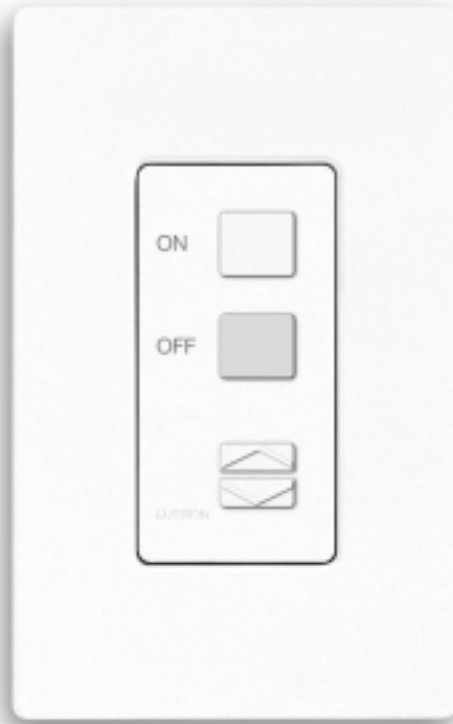

## DESCRIPTION


The Large Button Wallbox Transmitter is designed to work in conjunction with RadioTouch lighting Controllers. The Transmitter provides on/off and raise/lower functionality. The Transmitter does not require that any wires be connected from the Transmitter to the RadioTouch Controllers. The Transmitter can be used to control one or more RadioTouch lighting zones.

The Transmitter can also be used for multi-location dimming applications. Each Transmitter has a unique address and can be assigned to any RadioTouch Controller in the room that is within 35 feet of the Transmitter's location. The Transmitter can be easily configured for multi-gang installations without any need to de-rate the power capacity of the lighting zone being controlled.

<p><b>JOB NAME:</b></p>  <p><b>JOB NUMBER:</b></p>	<p><b>MODEL NUMBERS:</b></p>
--	------------------------------

**Product Dimensions:**

- A: 2.93" (74.4mm)
- B: 4.69" (119.1mm)
- C: 0.30" (7.5mm)
- D: 1.37" (34.8mm)
- E: 2.75" (70.0mm)



**Model:**

RTA-WX-2B-WH

**Colors:**

White (WH)

**Features:**

- Provides on/off and raise/lower functionality for one or more RadioTouch lighting zone Controllers.
- Operates at 120 or 277V line voltage.
- Each Transmitter is uniquely addressed from the factory.
- Each Transmitter can have its address added to any Controller mounted within 35 feet of the Transmitter.
- Provides multi-location dimming by simply adding more Transmitters into the room.
- Communicates with RadioTouch Controllers via radio frequency at 418 mhz.
- Does not require any wires to the RadioTouch Controllers that are being controlled.
- Allows for multi-gangng of Transmitters without any de-rating of the lighting circuit.

<p><b>JOB NAME:</b></p> <p><b>JOB NUMBER:</b></p>	<p><b>MODEL NUMBERS:</b></p>
--	------------------------------