


Conference Room | New Construction

ASHRAE 90.1-2010

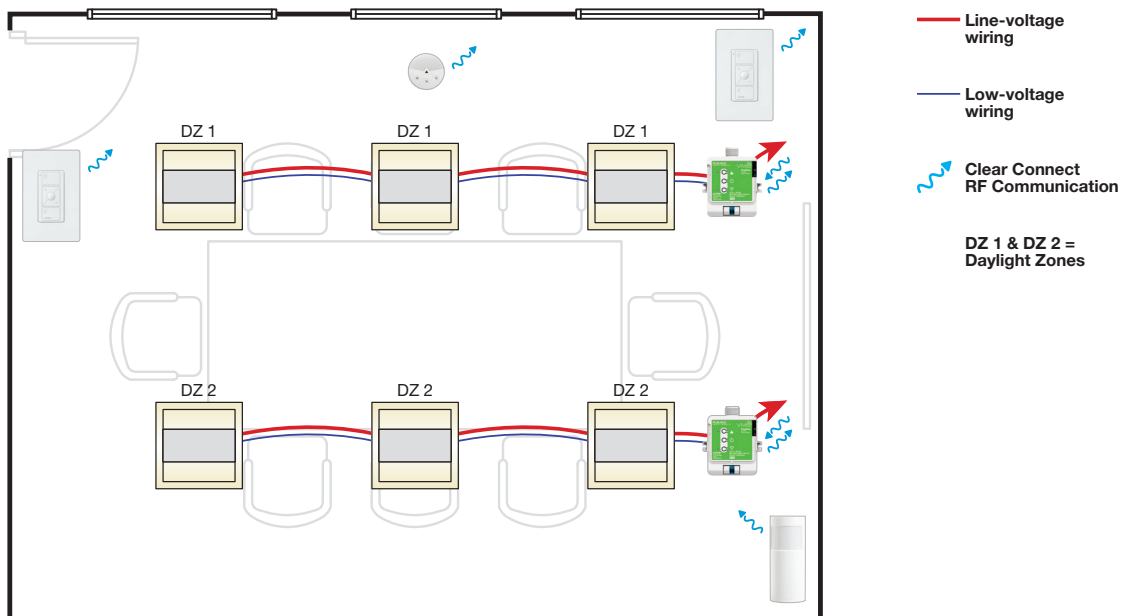

Symbol	Model Number	Description	Qty
	RMJS-8T-DV-B	PowPak dimming module with 0-10V	2
	LRF2-DCRB-WH	Radio Powr Savr wireless daylight sensor	1
	LRF2-VKLB-P-WH	Radio Powr Savr wireless corner-mount vacancy sensor	1
	PJ2-3BRL-GWH-L01	Pico wireless 3-button with raise/lower control	2
	PICO-WBX-ADAPT	Pico wallbox adapter	2

Control Functionality

Occupant Enters:

Lights do not automatically turn on when an occupant enters the space; lights must be turned on manually. Maximum light level is set to 80%.

When Occupied:

Automatic: Overhead lights dim/brighten based on daylight availability. There are two perimeter daylight zones.
Manual: Occupant uses wall dimmer to set desired light levels for all lights.

Occupant Exits:

All lights automatically turn off 15 minutes after all occupants exit.

Add a Vive wireless hub to enable simple setup and re-zoning, system monitoring, timeclock functionality, and advanced integration.

For non-daylight conference rooms the lighting can be connected to a single 0-10V dimming module.
Want to add a Vive wireless hub for more features? Go to lutron.com/vive for complete compatibility and design details.
This solution requires 0-10V enabled ballasts and drivers by others.