


Ballasts

EC5_Ballasts Eco-Ballast J Case Hi-Lume 3D Ballast Compact Ballast H-Series-Ballast

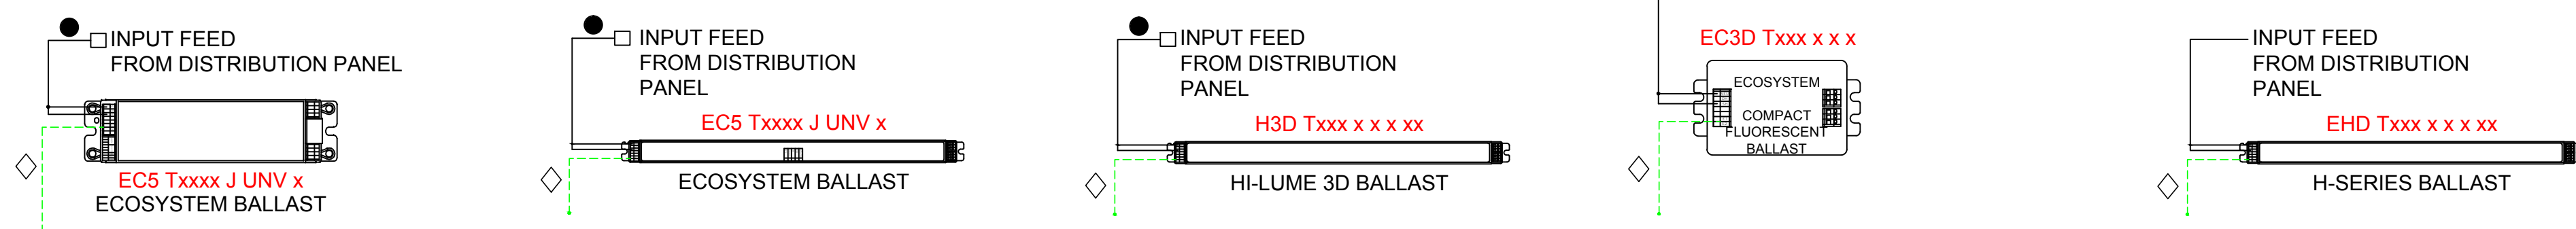


4BRL-J Ballast

IR-J Ballast


Daylight-J Ballast

Sensor-J Ballast

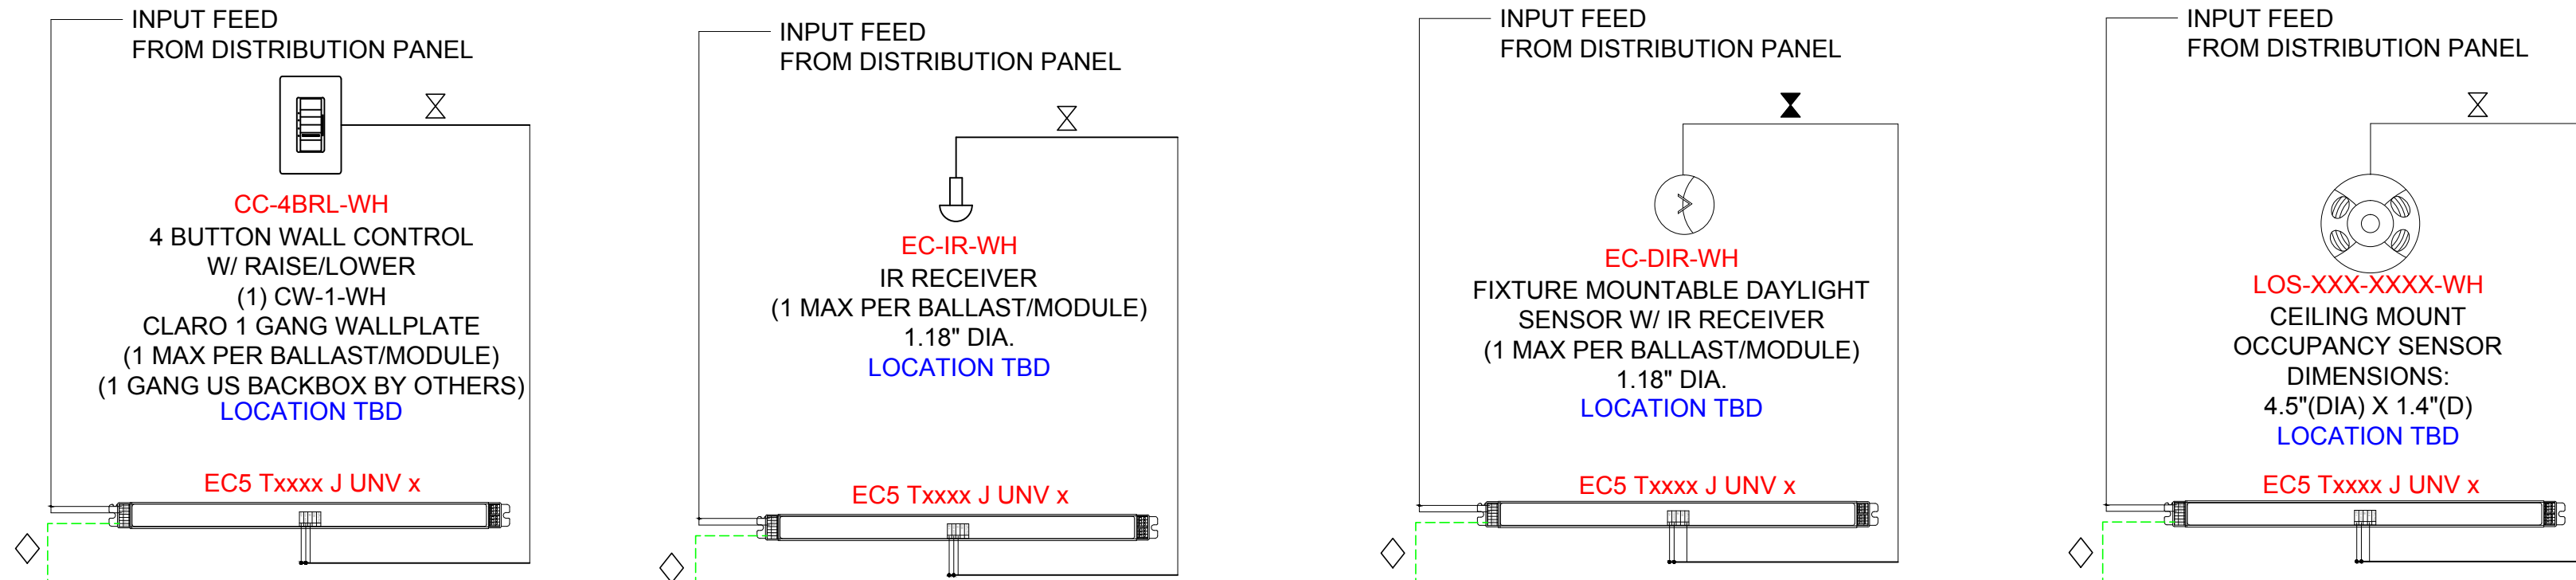

Modules


C5-BMJ-16A C5-BMJ-16A & PHPM-WBX-DV C5-BMJ-16A & PHPM-WBX-120

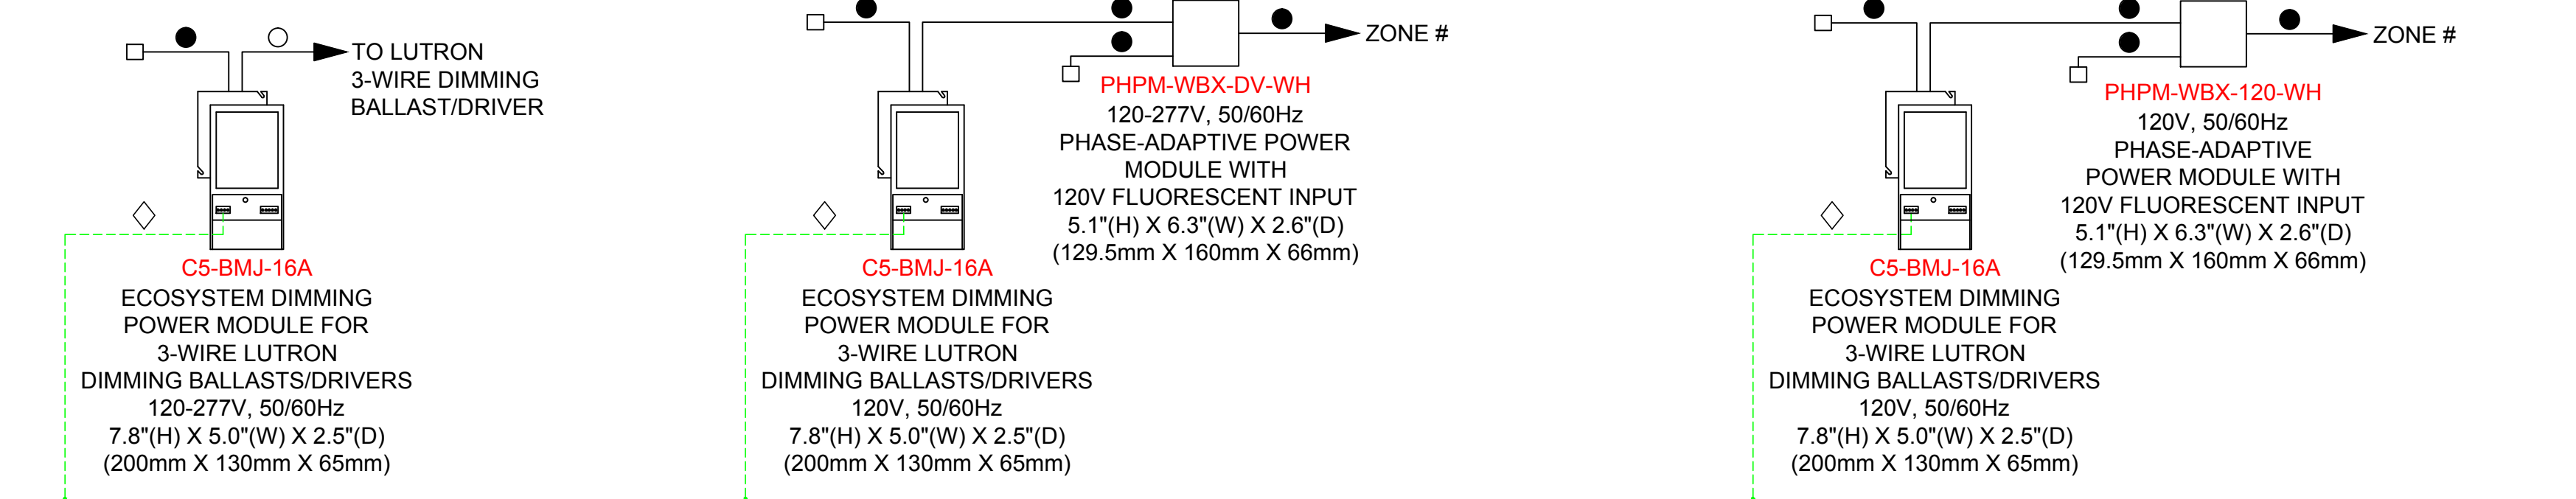

C5-XPJ-16A


C5-BMF-2A

C5-BMJ-16A & GRX-TVI

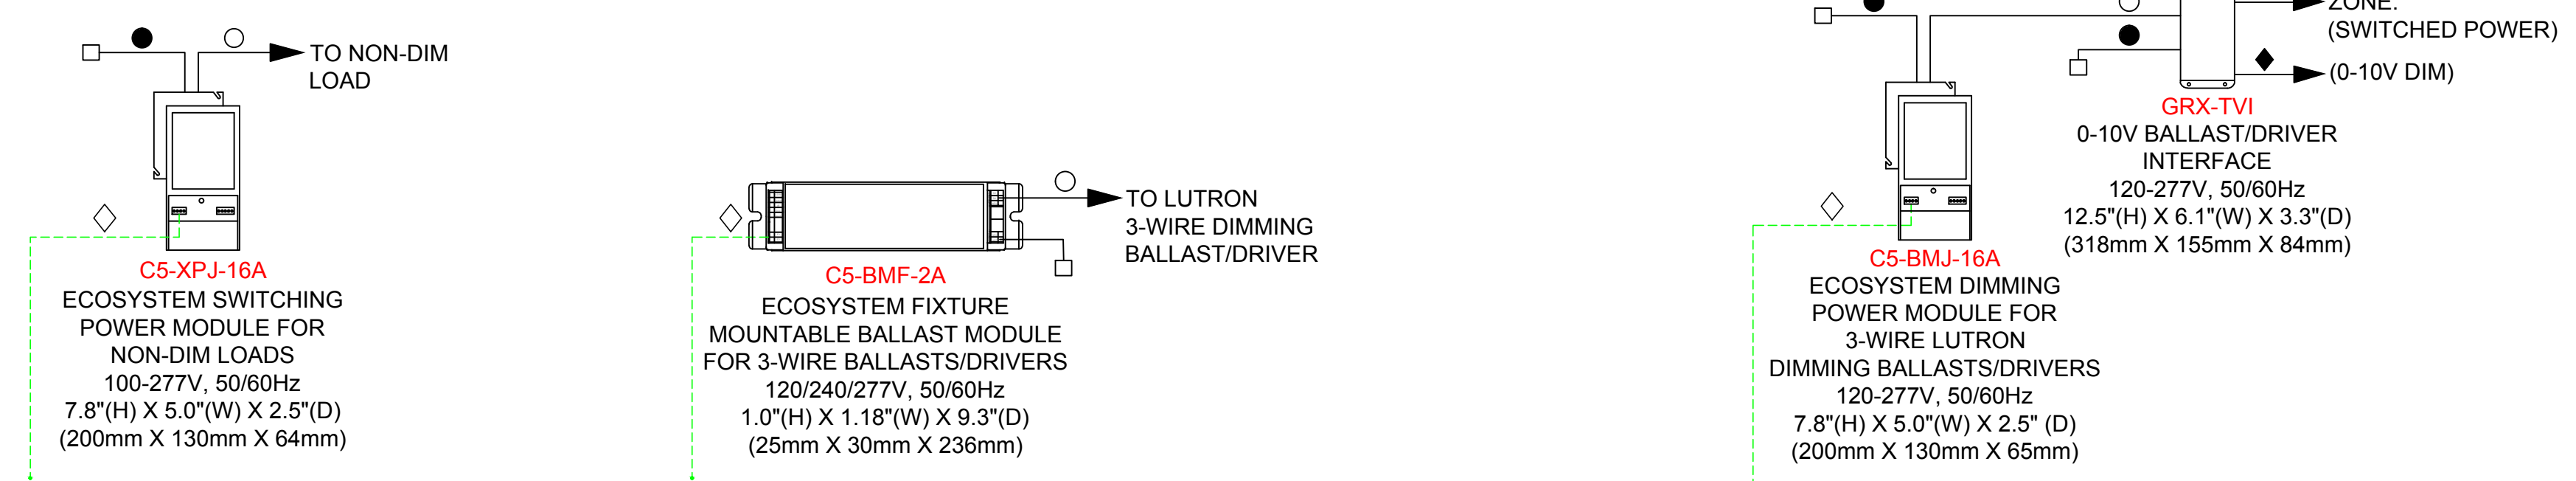


TVI-LMF-2A

Ecosystem Embedded Technology

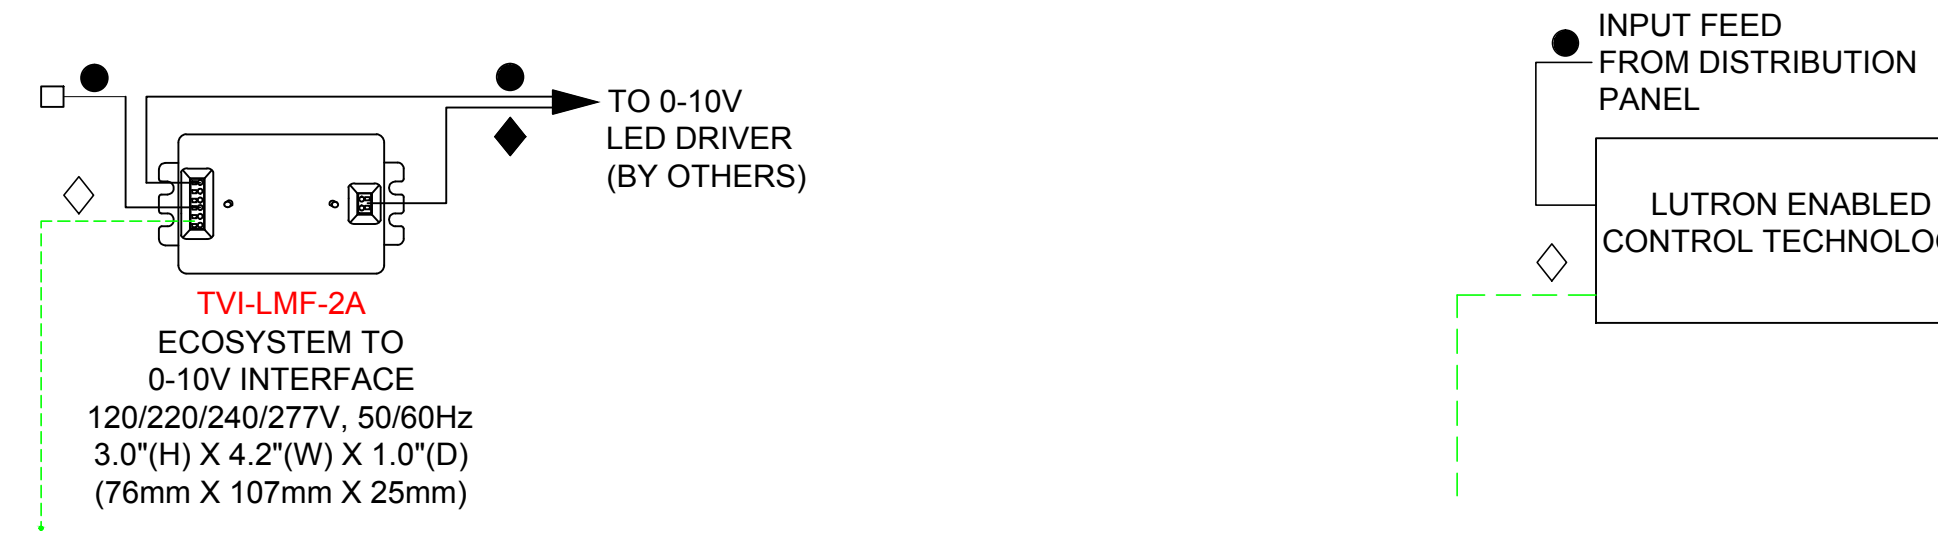

Drivers


HI-LUME DRIVERS

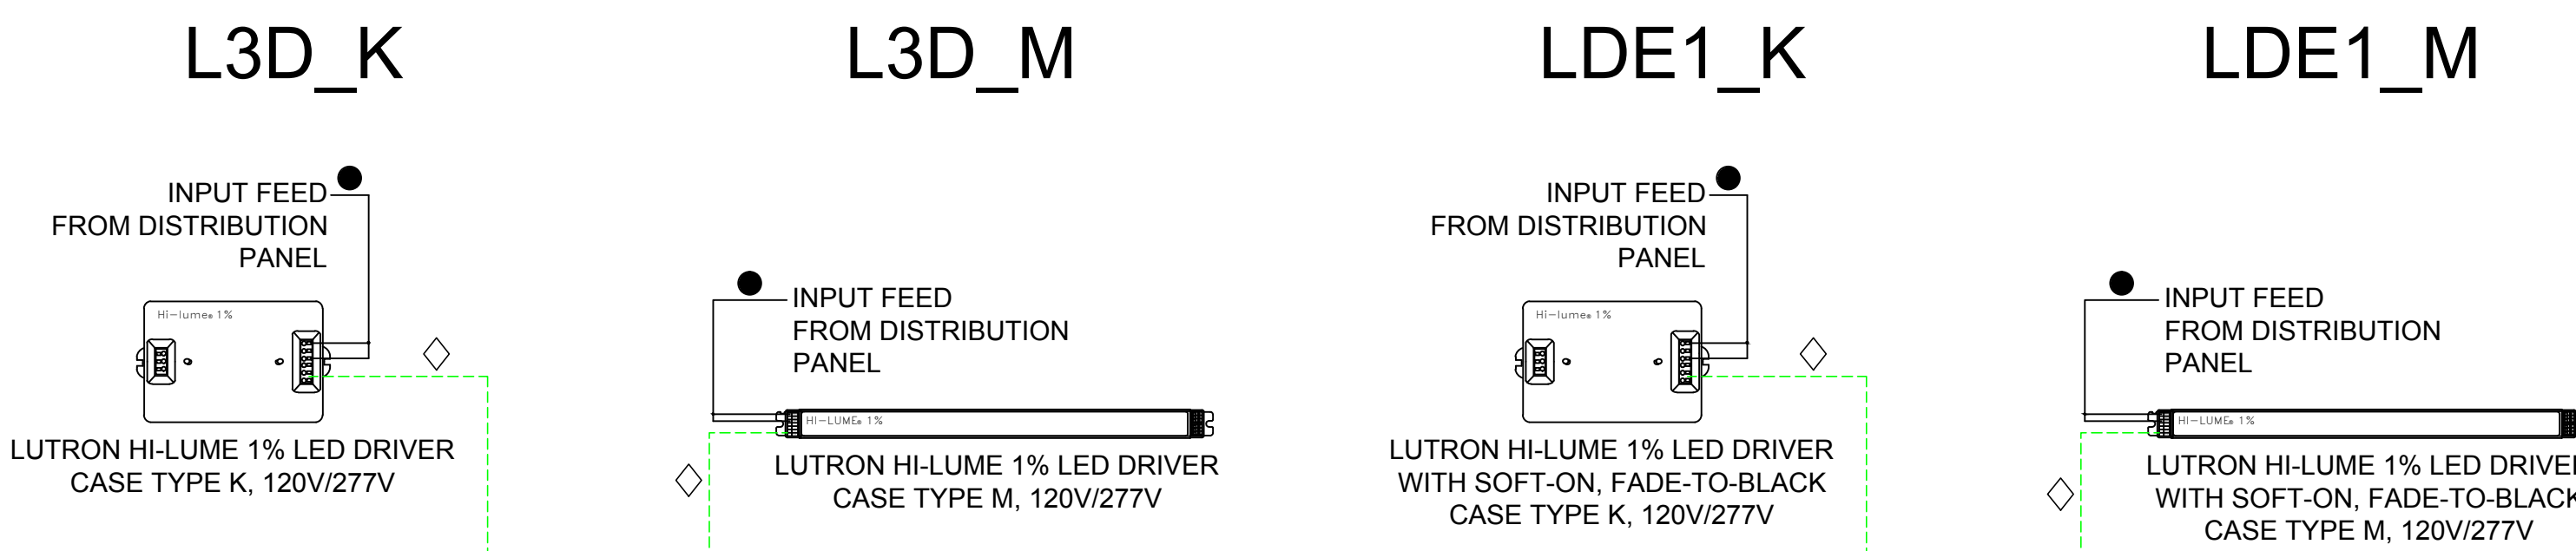

5 SERIES DRIVERS


HI-LUME PREMIER DRIVER

GENERIC LED DRIVER

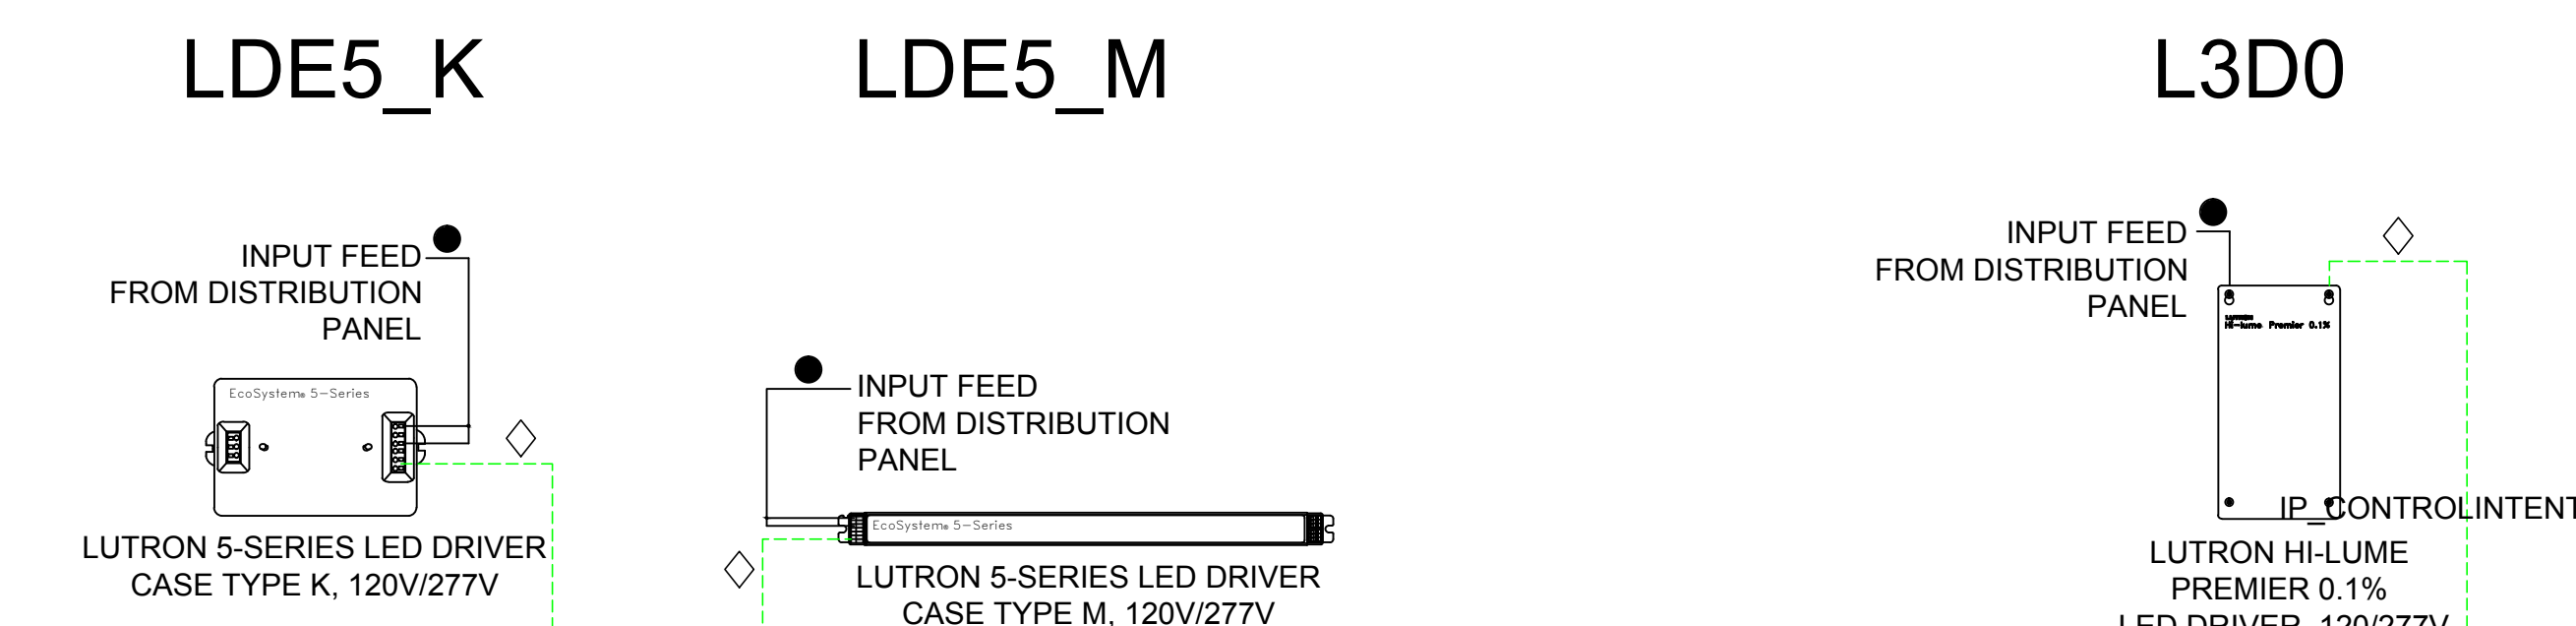

Devices

CC-4BRL C-FLRC

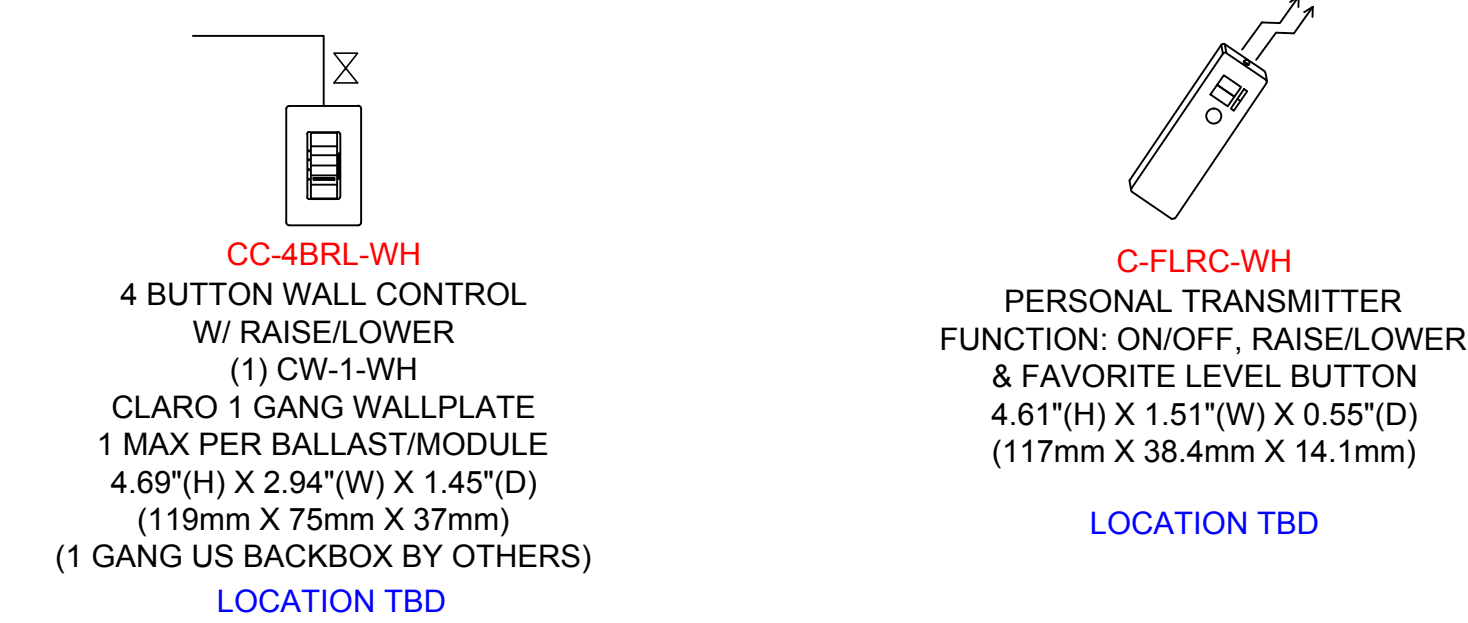

ECOSYSTEM BALLASTS, DRIVERS, AND MODULES

BLOCK LIBRARY

WIRING LEGEND:

- INPUT POWER (NORMAL)
- 2 #12AWG (4 mm²)
- 3 #12AWG (4 mm²)
- ◆ 0-10V SIGNAL: 2 #18AWG (1.0 mm²)
- ◇ ECOSYSTEM BUS LOOP: LUTRON CABLE C-CBL-215-GR-1 (2 #16 CONDUCTOR NON-PLENUM) OR C-CBL-216-GL-1 (2 #16 CONDUCTOR PLENUM RATED). OTHERWISE USE 2 #16 AWG (1.0 mm²) IF OTHERS
- ⊗ LUTRON SENSOR CABLE C-CBL-522S OTHERWISE USE 3 #22 AWG (1.0 mm²)
- ⊠ LUTRON SENSOR CABLE C-CBL-522S OTHERWISE USE 4 #22 AWG (1.0 mm²)

Drawn By: CMT
Drawing Date: FALL 2017