All dimming ballasts to be Lutron EcoSystem, Hi-Lume or Ecc-10 type.

E.E. to confirm all circuiting requirements.

Architect to verify quantity, location & finish of all controls.

All faceplates, dimmers, switches, receptacles & cable/phone jacks to be Lutron NOVA T*.

Lutron Field Service commissioning included in all systems initiates an 8 year limited warranty. The electrical contractor must contact Lutron (800-523-9466) to set up visit with 10 days notice.

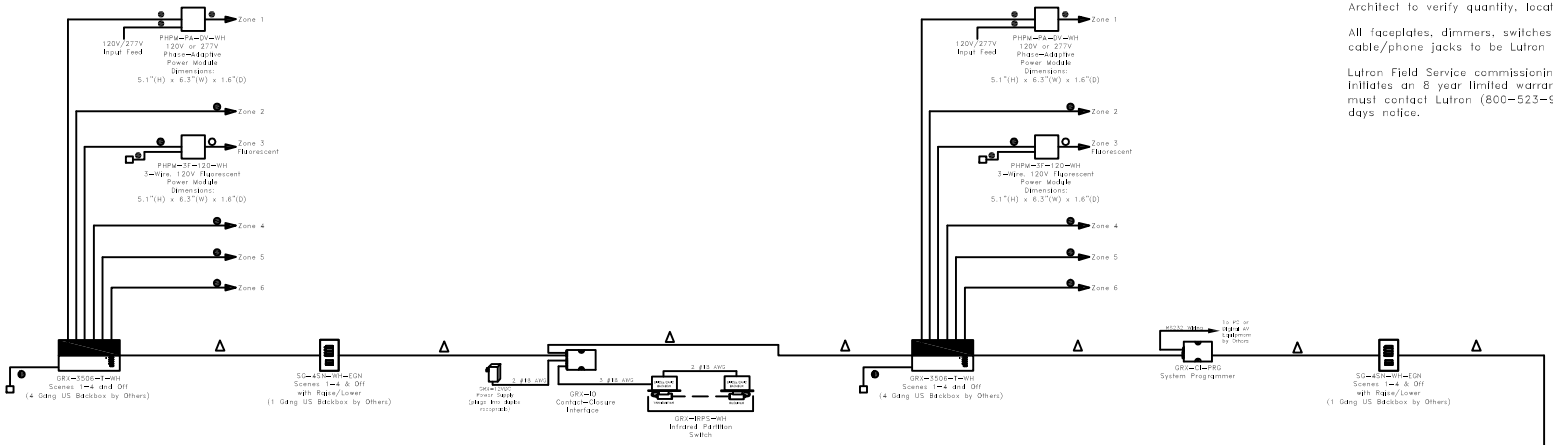

(Window Treatments provided by Window Treatment Dealer)

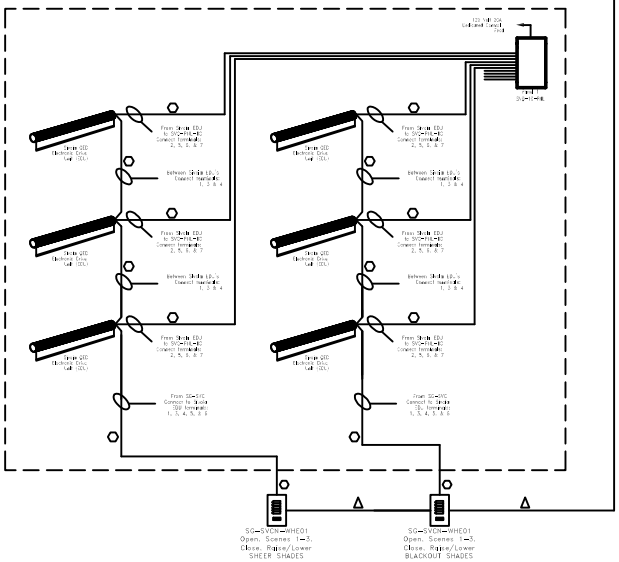

WIRING SYMBOLS

- ● 2 #12AWG (2.5 mm²)
- ○ 3 #12AWG (2.5 mm²)
- ■ 2 #12AWG (2.5 mm²) and 1 Twisted Pair #18AWG
- □ 120V Input Power
- ▲ Lutron cable GRX-CBL-346S (4 Conductor Non-Plenum) or GRX-PCBL-346S (4 Conductor Plenum rated). Otherwise use 2 #18AWG (1.0mm²) and 1 Belden #9461.
- ○ Sivoia link requires Lutron cable SVO-CBL-250 or 2 #16(Power), 1 #18 (Gnd) plus 4 #18 Twisted and Shielded.

GRAFIK Eye 3000 System

CONCEPT DRAWING
NOT FOR CONSTRUCTION

Project Number:	X
Drawn By:	X
Drawing Revision:	X
Drawing Date:	X
Sheet:	X

LUTRON.
Lutron Electronics Co., Inc.
7200 Suter Road | Coopersburg, PA 18036 | USA
(610) 282-3800 | fax (610) 282-1146