


HWI-PNL-8  
 Accommodates 8 remote power modules  
 (RPM-4A, RPM-4U, RPM-4FSO, RPM-4M, RPM-4R)  
 in any combination and one module interface  
 or one 8-series Homeworks processor (H8P5-MI-D48-120 shown)  
 Dimensions: 14 3/8" x 59" x 3 7/8"

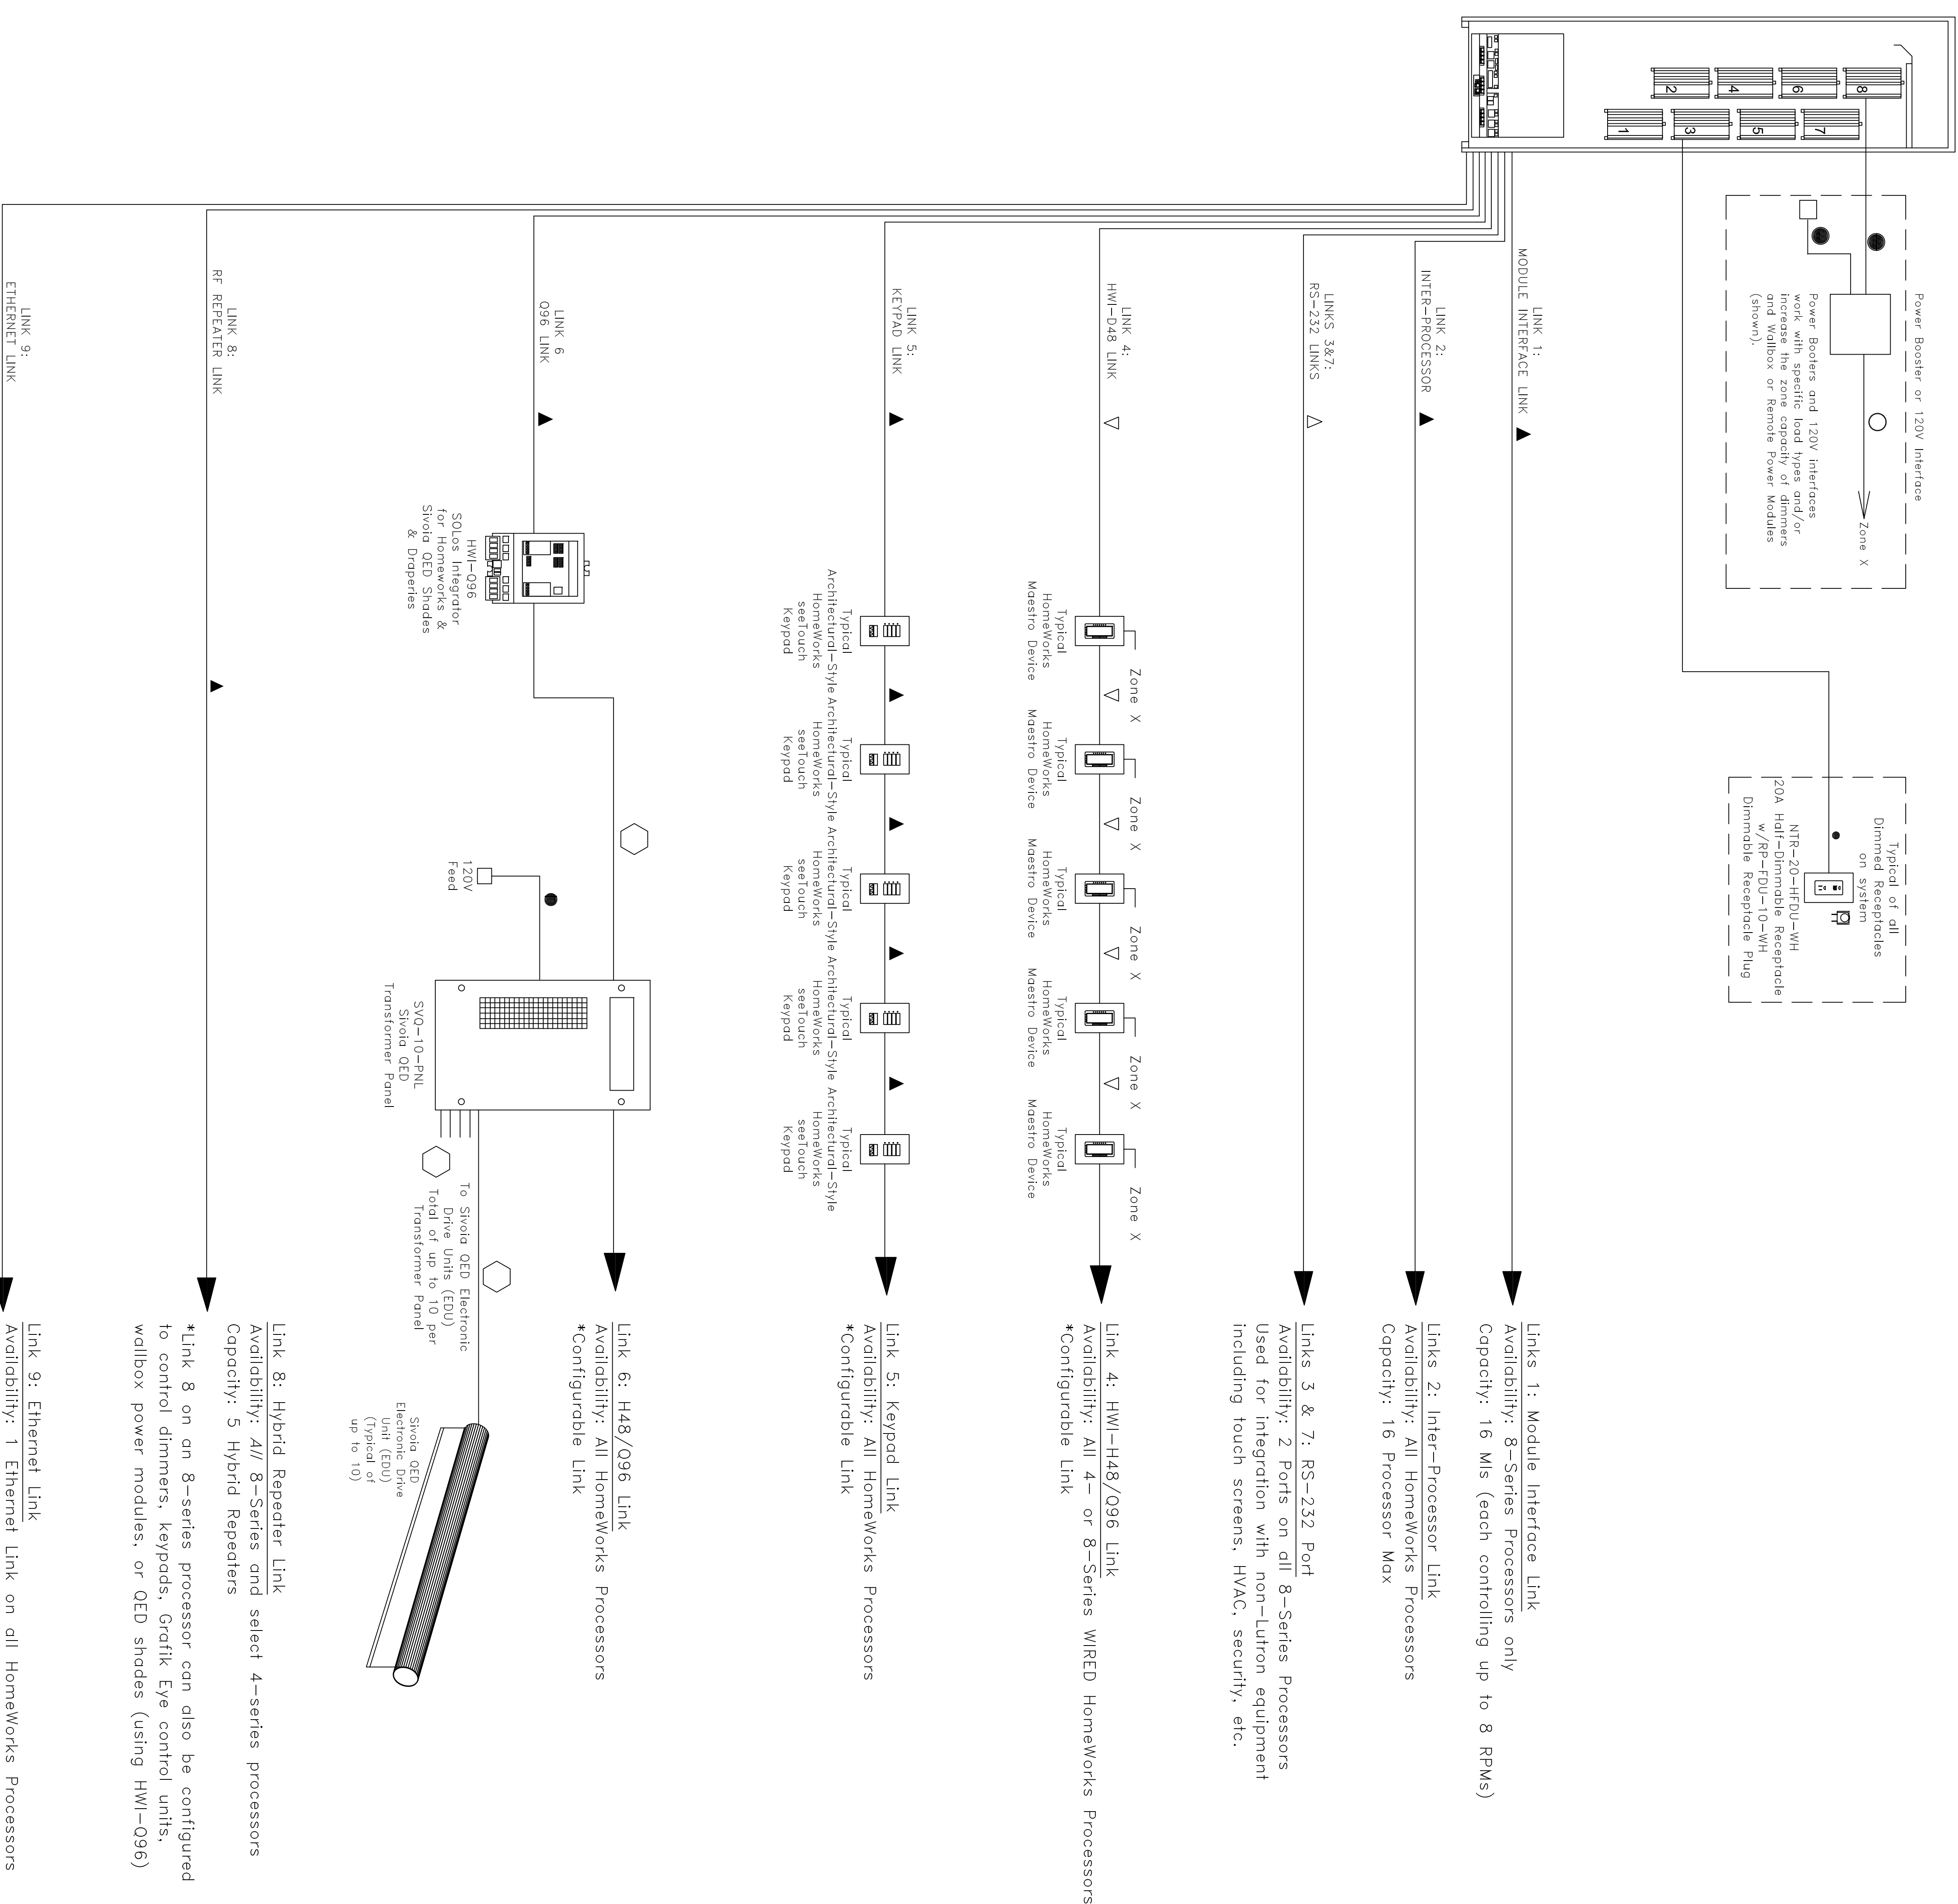

All dimming ballasts to be Lutron EcoSystem, HI-Lume or Eco-10 type.  
 E.E. to confirm all circuiting requirements.  
 Architect to verify quantity, location & finish of all controls.  
 All faceplates, dimmers, switches, receptacles & cable/phone jacks to be Lutron NOVA T\*.  
 Lutron Field Service commissioning included in all systems initiates an 8 year limited warranty. The electrical contractor must contact Lutron (800-523-9466) to set up visit with 10 days notice.

- WIRING NOTES**
- △ Standard RS-232 Cable
  - ▽ (all pins straight through)
  - ▽ One pair #18-22 AWG twisted shielded Class 2 wire.
  - ▲ Two pair (one pair #18 AWG, shielded) Class 2 wire. Lutron color coding may be used.
  - 2 #12 AWG (2.5mm<sup>2</sup>)
  - 3 #12 AWG (2.5mm<sup>2</sup>)
  - Input Power

**Typical Homeworks 8 Series One-line**

**CONCEPT DRAWING NOT FOR CONSTRUCTION**

Project Number:	X
Drawn By:	X
Drawing Reviser:	X
Drawing Date:	X
Sheet:	X