


- ▲ Standard RS-232 Cable (all pins & wire integrity)
- ▲ Two Pair Core pair AT&T AWG. 5 shielded, Class 2 wire. Lutron dimmers may also be used. Maximum 1000 ft. (Only Cable per Box)

All dimming ballasts to be Lutron EcoSystem, HI-Lume or Eco-10 type.
 E.E. to confirm all circuiting requirements.
 Architect to verify quantity, location & finish of all controls.
 All faceplates, dimmers, switches, receptacles & cable/phone jacks to be Lutron NOVA T4.
 Lutron Field Service commissioning included in all systems initiates an 8 year limited warranty. The electrical contractor must contact Lutron (800-523-9466) to set up visit with 10 days notice.

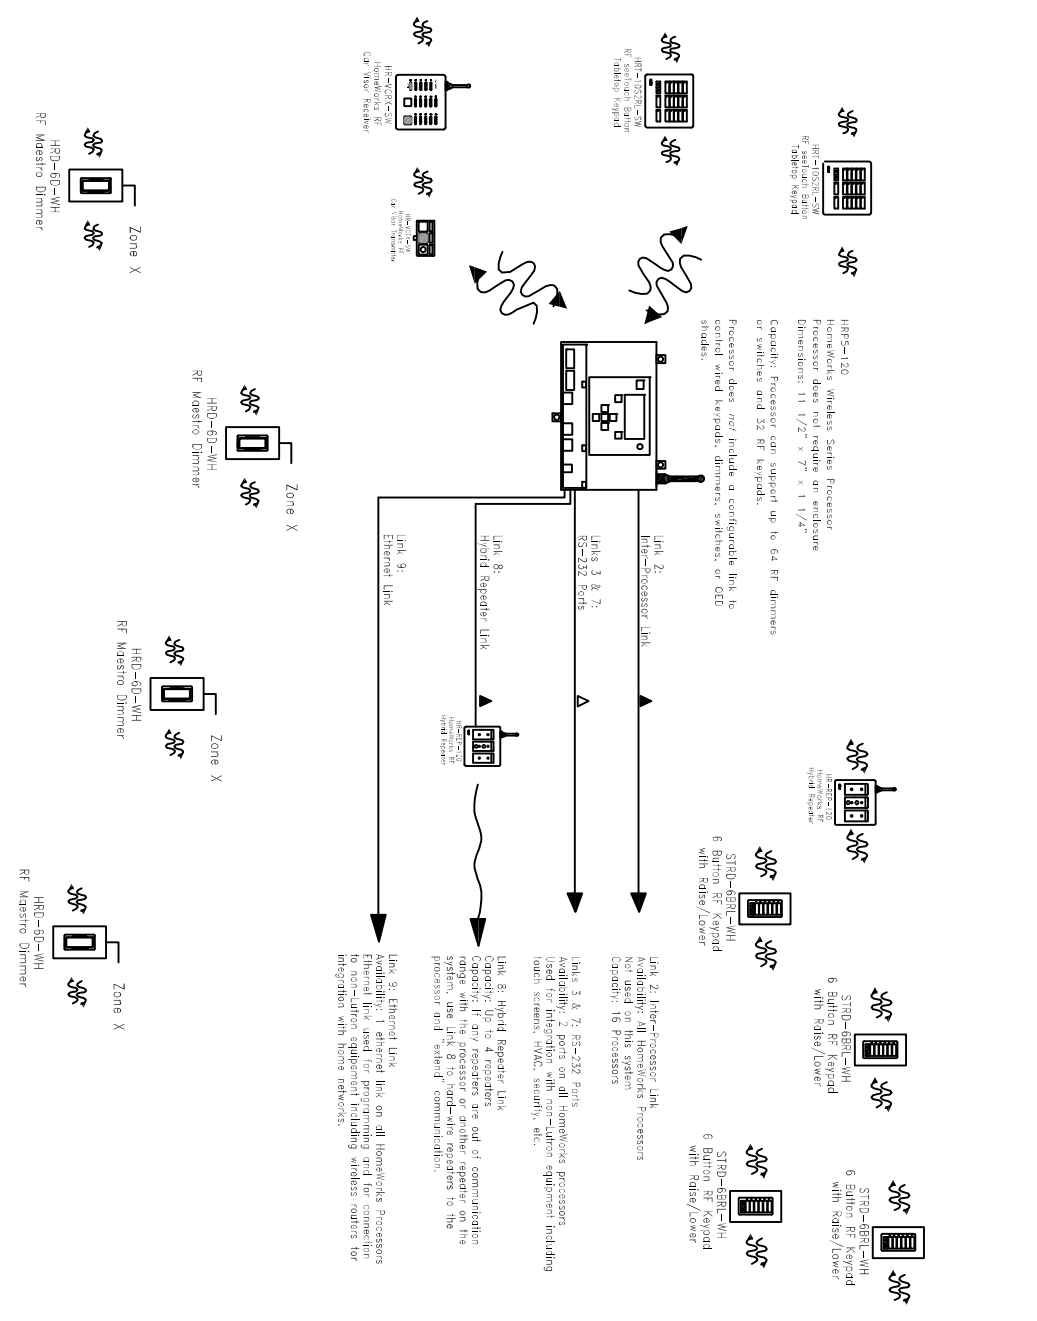

HomeWorks RF Series Typical

CONCEPT DRAWING
 NOT FOR CONSTRUCTION

Project Number:	X
Design By:	X
Designing Engineer:	X
Designing Date:	X
Drawn:	X
Checked:	X

