

Lutron®—Insulating Honeycomb Shade Selection Guide


Residence: _____ Room: _____ Window(s): _____

Important: If you plan on installing the shade in a place where you need to raise the entire shade above an obstacle (such as above doors that open), please refer to our [stacking guidelines](#) (P/N 368-2548) or contact customer service to determine how high to mount your shade.


Step 1 Option A: Inside Mount Measurements

Inside Mount Measurements


- Depth of window must be at least 1½" (38.1 mm) to use inside mounting option.
- Do not make any deductions from the width! Lutron will deduct ¼" (3.175 mm) per side on inside mounted shades to allow room for proper operation.
- Lutron will make NO additions or deductions to the height measurement.



Width:

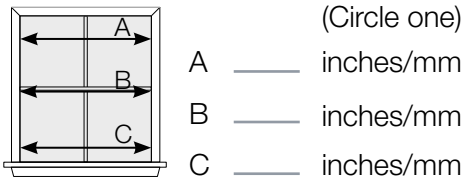

Height:

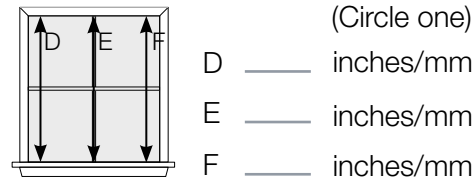


Order width: _____ inches/mm
(**Smallest** of the three measurements)



Order height: _____ inches/mm
(**Largest** of the three measurements)

Step 1 Option B: Outside Mount On Trim Measurements

Width: The width of your shades is up to you. For example, if you'd like to completely cover the window, measure from edge to edge of the frame.

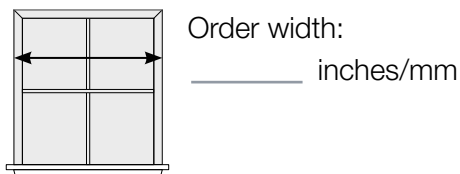


Height: Measure from the top of the trim to the windowsill.

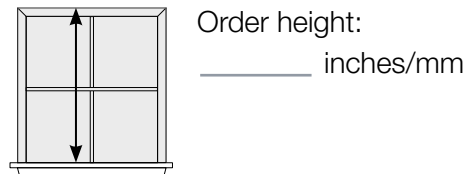



Step 1 Option C: Outside Mount Above Trim Measurements

Width: The width of your shades is up to you. For example, if you'd like to completely cover the window, measure from edge to edge of the frame.

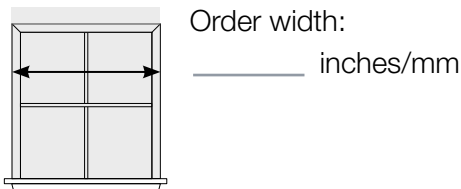

Height: Determine where you're going to mount the shade. Then measure from where the top of the headrail would fall, down to the windowsill.

Note: The motorized bracket is 2 5/8" (66.7 mm) high, however, it is recommended to allow for at least 3 1/8" (79.4 mm) of space above the top edge of the window trim (manual shade brackets require you to allow for 1 5/8" (41.3 mm)).

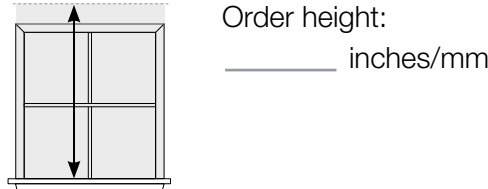

Step 2 Select Pleat Style and Fabric

Single-cell Light-filtering



- Point-bonded*
- Spun Lace**
 - Vinyl
 - Aluminum
- Crush
- Woven

Double-cell Light-filtering



- Spun Lace

Single-cell Sheer



- Sheer*
 - Vinyl
 - Aluminum





Single-cell Room-darkening



- Point-bonded
- Spun Lace*
 - Vinyl
 - Aluminum

* Available in fire rated fabrics.

** Most fabrics come standard with either a vinyl or aluminum headrail. However, certain fabrics allow a choice in headrail material.



Fabric Color: _____ (see Honeycomb Shade binder)

Step 3 Select Power Options



- Batteries



- Plug-in



- Power Panel (Sivoia QS Wireless only)



- Manual

Step 4a Select Stand Alone Control



- RF Control



- IR

Step 4b Select System Control (Sivoia QS Wireless only)



- Keypad



- Timeclock



- Mobile device



- 3rd party integration



- Pico® wireless control

Please note: Product options may vary depending on application and intended use. For more technical information, reference www.lutron.com/honeycombshades or work with your Lutron qualified installer. Product availability is subject to change.

www.lutron.com



World Headquarters 1.610.282.3800 | 24/7 Technical Support 1.800.523.9466 | Customer Service 1.888.LUTRON1 (1.888.588.7661)

© 05/2012 Lutron Electronics Co., Inc. | P/N 367-2243 REV E

