


GRAFIK EYE/GRAFIK 6000 ACCESSORY CONTROLS

NT-DMXJ-IN-(finish) THEATRICAL STAGE BOARD RECEPTACLE

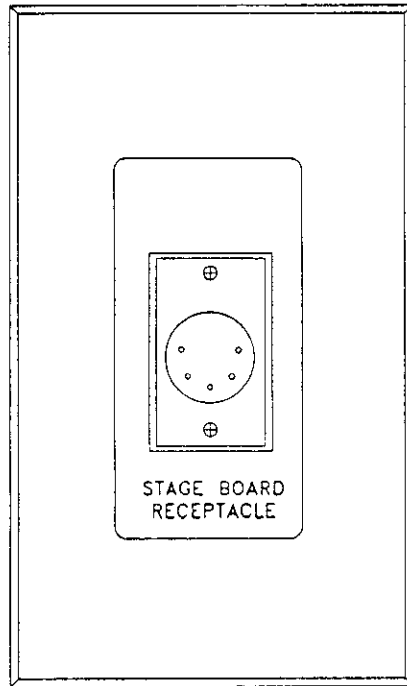


DESCRIPTION

CONTROL FEATURES A FIVE PIN XLR STYLE MALE JACK FOR CONNECTION TO A THEATRICAL STAGE BOARD. THIS RECEPTACLE PROVIDES STANDARD PINOUT FOR DMX-512 (THEATRICAL PROTOCOL).



CONTROL REQUIRES A STANDARD SINGLE GANG WALLBOX BY OTHERS AND IS GANGABLE WITH OTHER GRAFIK EYE/GRAFIK 6000 AND NOVA T* DEVICES. THIS IS A CLASS 2 DEVICE. BARRIERS MUST BE PROVIDED WHEN LINE-VOLTAGE AND CLASS 2 CONTROLS ARE GANGED TOGETHER IN THE SAME WALLBOX.

ENGRAVING: 10 POINT HELVETICA
CENTER JUSTIFIED
BACKFILL COLOR: BLACK (FOR
WHITE PLASTIC)

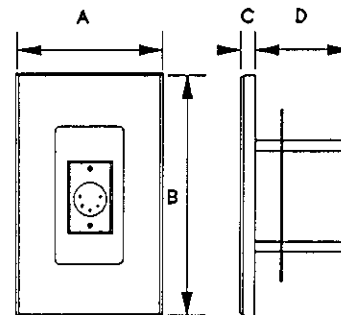

CONTROL MODEL #	A	B	C	D
NT-DMXJ-IN	2-3/4" (70mm)	4-9/16" (116mm)	5/16" (8mm)	7/8" (23mm)

NT-DMXJ-IN-(finish) Stage Board Receptacle - Wiring Instructions

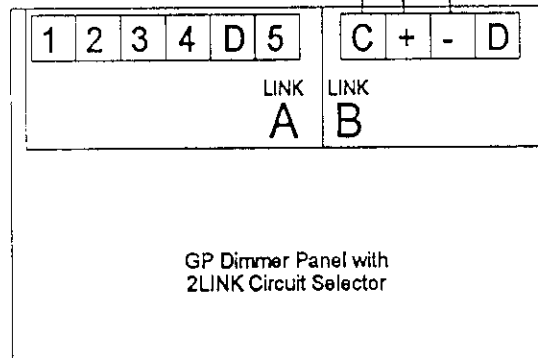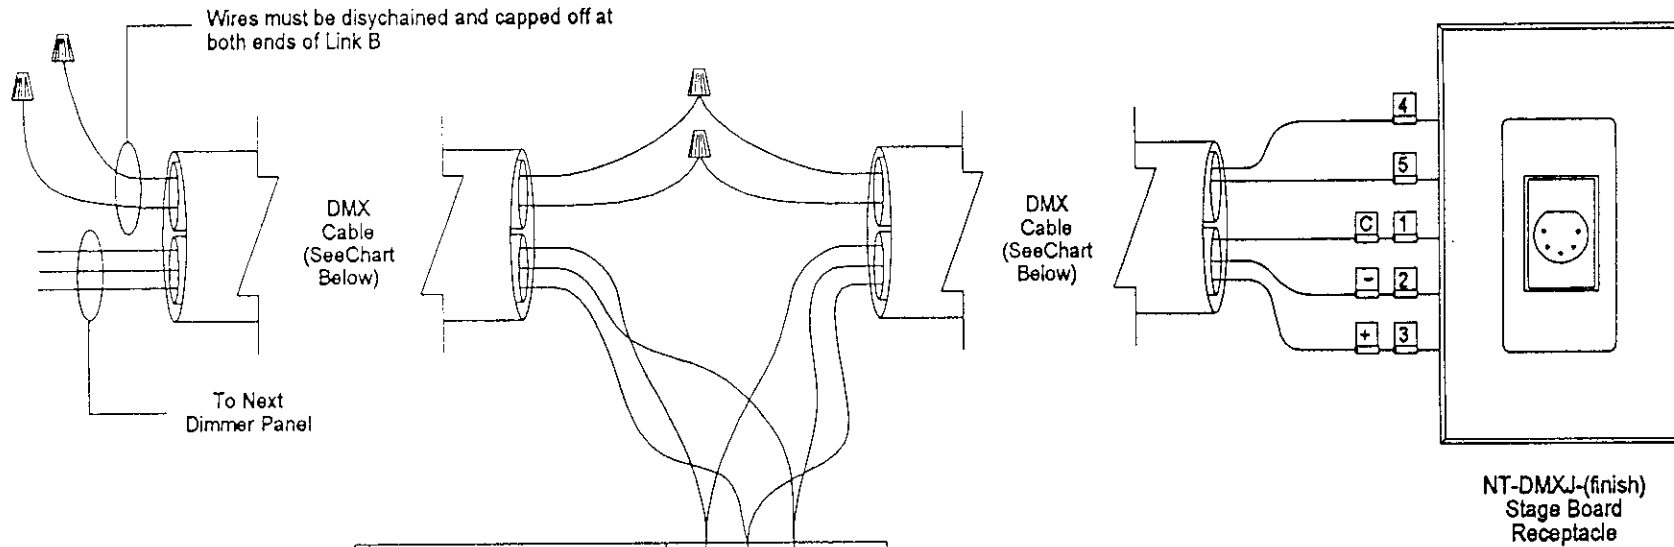

DMX Cable Wiring Table

DMX Cable Type	Wire	From Circuit Selector	To DMX Jack (Pin #)
Belden 9729/89729:	(2) drain,shield	C	C (1)
	white	+	+ (3) *
	black	-	- (2) *
	black	No Connection	- (4)
	red	No Connection	+ (5)
Duraflex 22/4WS:	(2) drain,shield	C	C (1)
	white	+	+ (3) *
	black	-	- (2) *
Lutron GRX-CBL-DMX-250	green	No Connection	- (4)
	red	No Connection	+ (5)

* Wire in daisy-chain configuration as follows: C to C, + to +, - to -



COOPERSBURG, PA 18036
PHONE: (610) 282-3800
FAX: (610) 282-1146