

# AuroRa®

## Returning the AuroRa® Central Antenna or Security Interface to Factory Default


Why return a Central Antenna or Security Interface to Factory Default?

Return a Central Antenna or Security Interface to Factory Default when you want to:


- Unbridge two *Aurora* Systems (this procedure needs to be done on only *one* of the Central Antennas or Security Interfaces)
- Remove all Wireless Controllers added to the system (the Wireless Controller that shipped with the system will remain assigned to the system)

Follow the steps below to return a Central Antenna or Security Interface to its Factory Default state.


- 1 Remove power from the Central Antenna.**  
Unplug the DC adapter from the back of the Central Antenna.

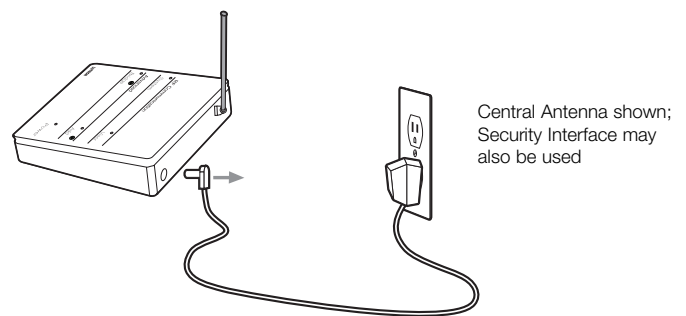

- 2 Press and hold the “Bridge” Button.**  
While still holding the “Bridge” Button, plug the DC adapter back into the back of the Central Antenna. The LEDs on the Central Antenna will turn on. Continue holding the “Bridge” Button until the LEDs on the Central Antenna flash quickly (approximately 3 seconds). **Before releasing the “Bridge” Button, go to Step 3.**

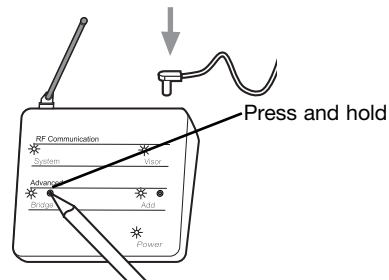

- 3 Release the “Bridge” Button and immediately (within 1/2 second) press and hold the “Bridge” Button.**  
The LEDs on the Central Antenna will turn on. Continue holding the “Bridge” Button until the LEDs on the Central Antenna flash quickly (approximately 3 seconds).

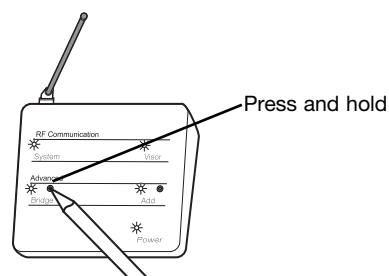

- 4 Release the “Bridge” Button.**  
The LEDs flash quickly (for approximately 5 seconds) to indicate the Central Antenna has been returned to Factory Default.

