


**WIRING SYMBOLS**  
 ● 2 #12AWG (2.5 mm<sup>2</sup>)  
 ▲ Lutron cable GRX-CBL-3465 (4 Conductor Non-Pennum) or GRX-PCBL-3465 (4 Conductor Pennum rated). Otherwise use 2 #16AWG (1.0mm<sup>2</sup>) and 1 Belden #9461.

All dimming ballasts to be Lutron EcoSystem, Hi-Lume or Eco-10 type.  
 E.E. to confirm all circuiting requirements.  
 Architect to verify quantity, location & finish of all controls.  
 All faceplates, dimmers, switches, receptacles & cable/phone jacks to be Lutron NOVA T\*.  
 Lutron Field Service commissioning included in all systems initiates an 8 year limited warranty. The electrical contractor must contact Lutron (800-523-9466) to set up visit with 10 days notice.

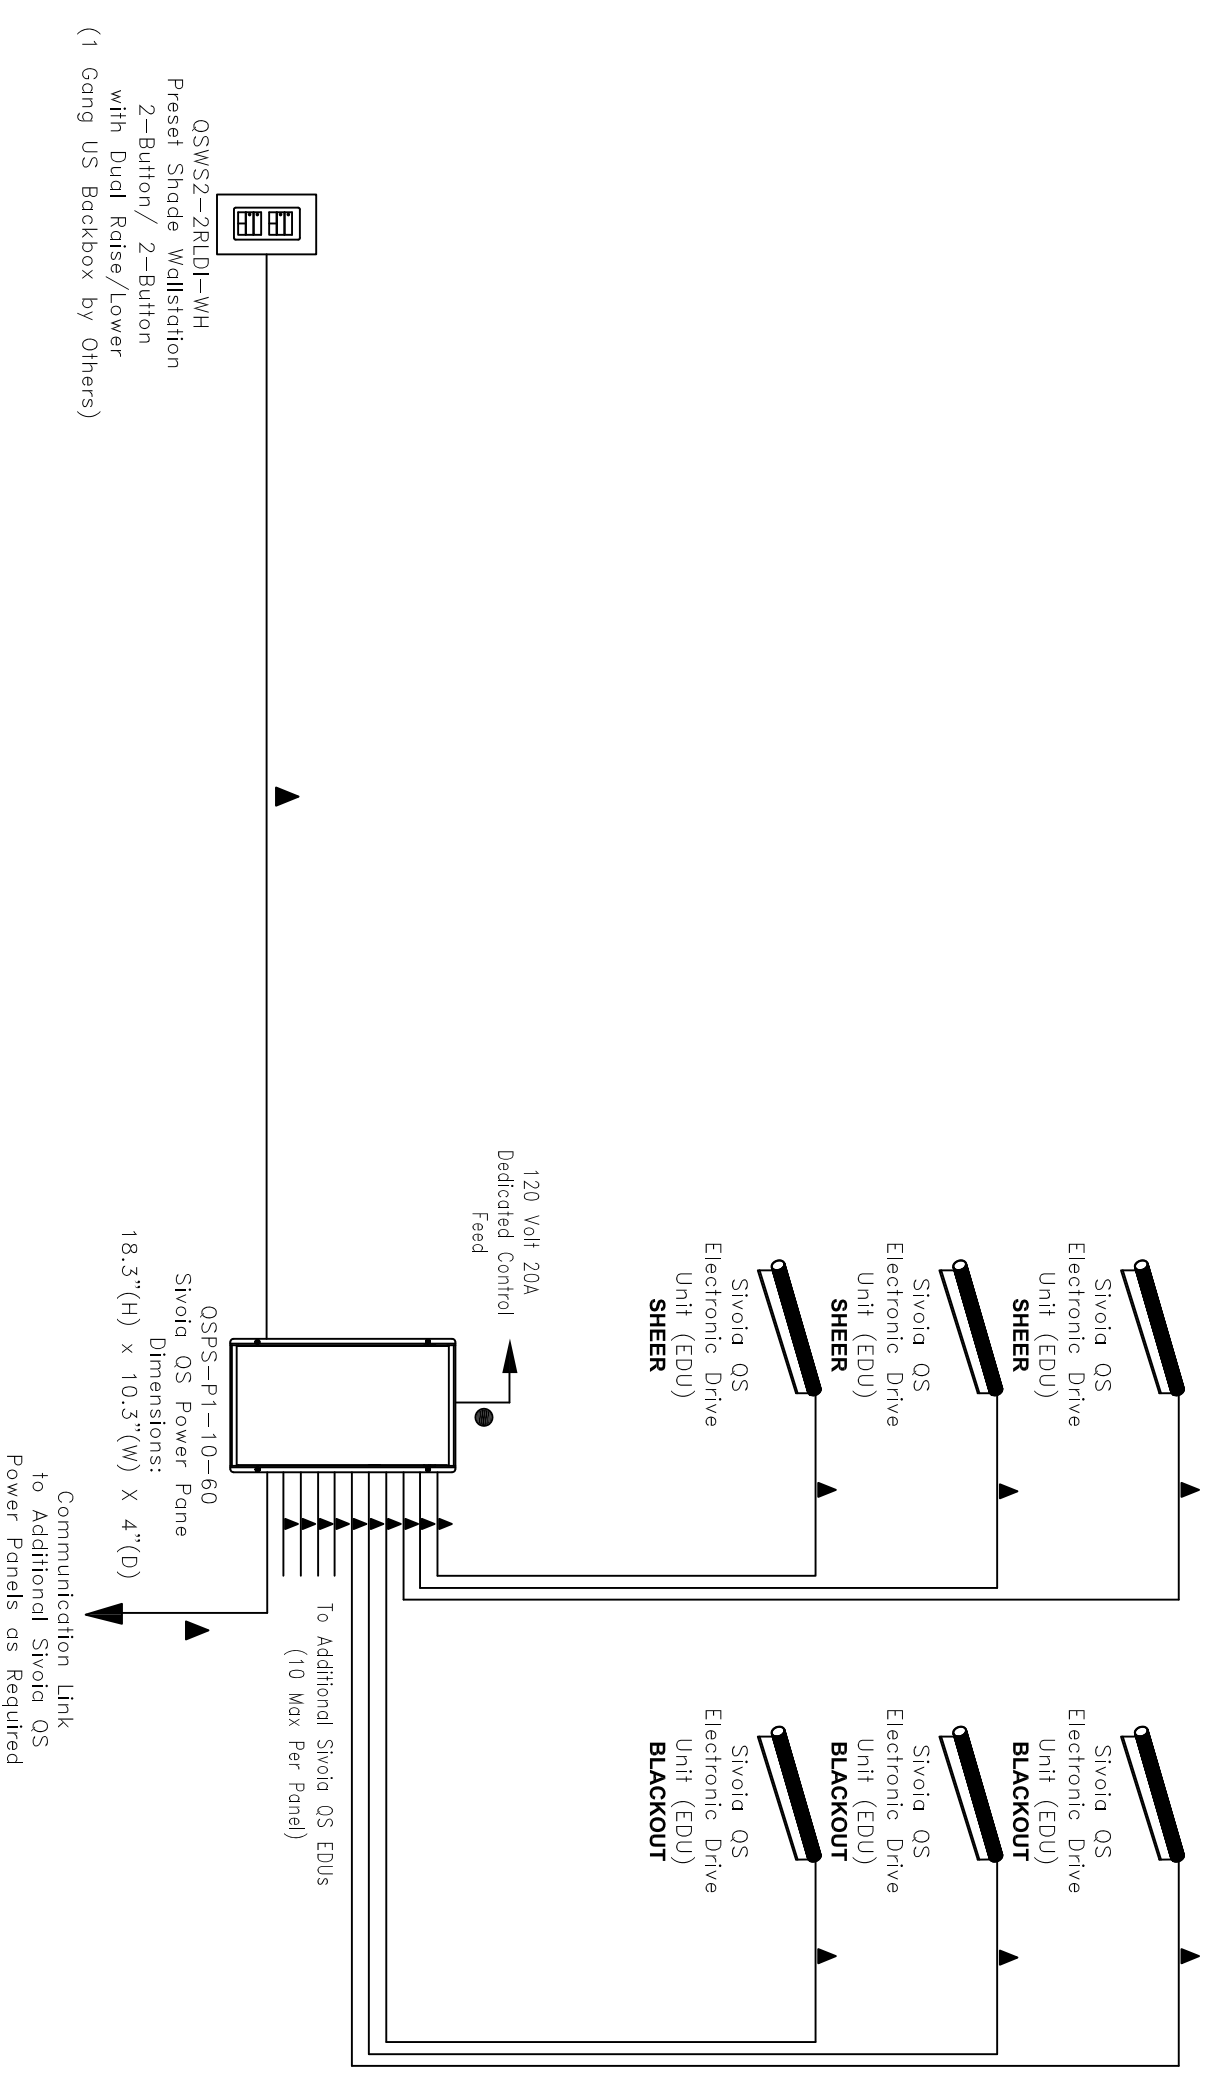

**Sivoia QS Typical**

**ONLINE DIAGRAM  
 CONCEPT ONLY  
 NOT FOR CONSTRUCTION**

Project Number:	X
Drawn By:	X
Drawing Revision:	X
Drawing Date:	X
Sheet:	X