


GRAFIK Slider Control Unit

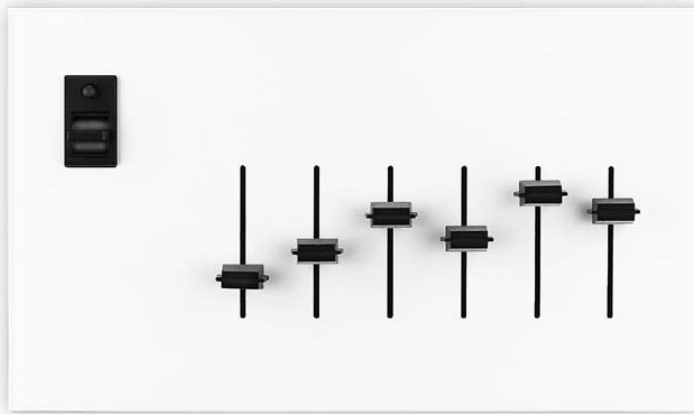

OMXSL-6-4G

Description

- Controls up to 12 zones of lighting.
- Allows full-range dimming using zone sliders.
- Controls virtually any light source via dimming panels.
- Mounts in a custom-designed wallbox.

Models available to:

- Control 1 to 12 zones of lighting.

Slider Control Units work with:

- GP and LP Dimming Panels

Job Name:	Model Numbers:
Job Number:	

Specifications

Power

- Low-voltage type Class 2 (PELV)
Operating voltage: 32VDC.

Lighting Sources/Load Types

Controls lighting sources with a smooth, continuous Square Law dimming curve via GP and LP Dimming Panels.

Lighting Control

- Sliders provide intuitive method of controlling a local lighting space.

Key Design Features

- Meets IEC 801-2. Tested to withstand 15kV electrostatic discharge without damage or memory loss.
- Power failure memory automatically restores lighting to the level selected prior to power interruption.
- Faceplate snaps on with no visible means of attachment.

System Communications and Capacities


- Low-voltage type Class 2 (PELV) wiring connects Control Units to other system components.
- The Slider Control Unit counts as one of 32 maximum Wallstations and/or Control Interfaces allowed on a Class 2 (PELV) Wallstation Link.

Environment

- 32-104°F (0-40°C). Relative humidity less than 90% non-condensing.

Job Name:	Model Numbers:
Job Number:	

How to Build a Model Number

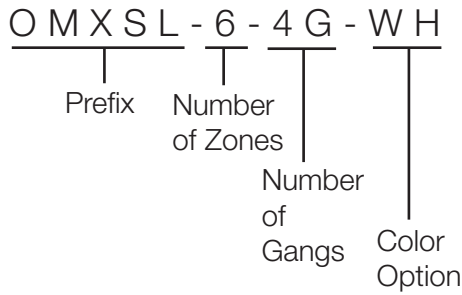

Model Numbers

Number of Zones	Model Number
1	OMXSL-1-1G-__
2	OMXSL-2-2G-__
3	OMXSL-3-2G-__
4	OMXSL-4-3G-__
5	OMXSL-5-3G-__
6	OMXSL-6-4G-__
7	OMXSL-7-4G-__
8	OMXSL-8-5G-__
9	OMXSL-9-5G-__
10	OMXSL-10-6G-__
11	OMXSL-11-6G-__
12	OMXSL-12-7G-__

Prefix:

OMXSL for GRAFIK Slider Control Units

Number of Zones:

1,2,3,4,5,6,7,8,9,10,11, or 12

Number of Gangs:

Indicates number of wallbox gangs required for installation. Example: 4G = 4 gangs.

Color Option:

Architectural Matte Finishes

White	WH
Ivory	IV
Beige	BE
Gray	GR
Brown	BR
Black	BL

Architectural Metal Finishes

Bright Brass	BB
Bright Chrome	BC
Satin Brass	SB

Job Name:	Model Numbers:
Job Number:	

Dimensions

Model Number	Wallbox Size	Width	Height	Depth ¹
OMXSL-1-1G-__	Single-gang	2.31" (59mm)	4.06" (103mm)	3.00" (76mm)
OMXSL-2-2G-__	Two-gang	4.13" (105mm)	4.06" (103mm)	3.00" (76mm)
OMXSL-3-2G-__	Two-gang	4.13" (105mm)	4.06" (103mm)	3.00" (76mm)
OMXSL-4-3G-__	Three-gang	5.94" (151mm)	4.06" (103mm)	3.00" (76mm)
OMXSL-5-3G-__	Three-gang	5.94" (151mm)	4.06" (103mm)	3.00" (76mm)
OMXSL-6-4G-__	Four-gang	7.88" (200mm)	4.06" (103mm)	3.00" (76mm)
OMXSL-7-4G-__	Four-gang	7.88" (200mm)	4.06" (103mm)	3.00" (76mm)
OMXSL-8-5G-__	Five-gang	9.56" (243mm)	4.06" (103mm)	3.00" (76mm)
OMXSL-9-5G-__	Five-gang	9.56" (243mm)	4.06" (103mm)	3.00" (76mm)
OMXSL-10-6G-__	Six-gang	11.38" (289mm)	4.06" (103mm)	3.00" (76mm)
OMXSL-11-6G-__	Six-gang	11.38" (289mm)	4.06" (103mm)	3.00" (76mm)
OMXSL-12-7G-__	Seven-gang	13.19" (335mm)	4.06" (103mm)	3.00" (76mm)

¹ Depth includes wallplate and backbox. Wallplate depth is 0.25" (6.35mm)

Job Name:	Model Numbers:
Job Number:	