



Report Card

(For fixtures using the Lutron Hi-lume LED Driver)

Manufacturer: Zumtobel

Website: www.zumtobel.us

Applicable Model Numbers: BASYS Square

Date: May 2010

Fixture Manufacturer's Description


Type of Fixture: Downlight

Operating Voltage: 120V / 277V

Control Types: 3 Wire/ EcoSystem

Dimming Range: 100% - 1%

Input Current (max.): 0.27 A (120V) / 0.13 A (277V)

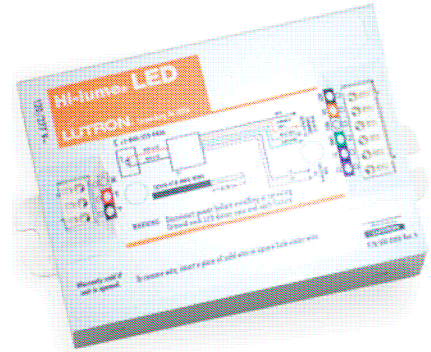

Driver Manufacturer: Lutron Electronics

Product: Hi-Lume LED Driver

Compatible Lutron Products

| Product | Part Number | Fixtures per Dimmer | | Measured Light Output Range |
|----------------------------------|---|-----------------------|-------|-----------------------------|
| | | 120V | 277V | |
| NovaT | NTF-10, | 1-59 | - | 100% - 1% |
| NovaT | NTF-103P, NTF-10-277 | 1-29 | 1-61 | 100% - 1% |
| NovaT | NTF-103P-277 | - | 1-46 | 100% - 1% |
| Nova | NF-10 | 1-59 | - | 100% - 1% |
| Nova | NF-103P, NF-10-277 | 1-29 | 1-61 | 100% - 1% |
| Nova | NF-103P-277 | - | 1-46 | 100% - 1% |
| Vareo | VF-10 | 1-29 | - | 100% - 1% |
| Skylark | SF-10P, SF-103P | 1-29 | - | 100% - 1% |
| Skylark | SF-12P-277, SF-12P-277-3 | - | 1-46 | 100% - 1% |
| Diva | DVF-103, DVSCF-103P | 1-29 | - | 100% - 1% |
| Diva | DVF-103P-277, DVSCF-103P-277 | - | 1-46 | 100% - 1% |
| Ariadni | AYF-103P | 1-29 | - | 100% - 1% |
| Ariadni | AYF-103P-277 | - | 1-46 | 100% - 1% |
| Vierti | VTF-6AM | 1-22 | - | 100% - 1% |
| Maestro | MAF-6AM, MAF-6AM-277, MSCF-6AM, MCSF-6AM-277 | 1-22 | 1-46 | 100% - 1% |
| Maestro Wireless | MRF2-F6AN-DV | 1-22 | 1-46 | 100% - 1% |
| Spacer System | SPSF-6A, SPSF-6A-277, SPSF-6AM, SPSF-6AM-277 | 1-22 | 1-46 | 100% - 1% |
| Lyneo | LXF-103PL | 1-29 | - | 100% - 1% |
| Lyneo | LXF-103PL-277 | - | 1-46 | 100% - 1% |
| Interfaces ⁽¹⁾ | PHPM-3F | 1-59 | 1-123 | 100% - 1% |
| | GRX-FDBI-16A | 1-59 | - | 100% - 1% |
| EcoSystem | CS-1L-WM, CS-2L-WM, CS-1L-CM, CS-2L-CM, EcoSystem ESN | 64 per EcoSystem link | | 100% - 1% |
| | Grafik Eye QS with EcoSystem | 64 per EcoSystem link | | 100% - 1% |
| | Quantum | 64 per EcoSystem link | | 100% - 1% |

⁽¹⁾ For use with 3 Wire controls or Commercial Systems, RA Systems or Home Systems applications