




Report Card

(For fixtures using the Lutron Hi-lume LED Driver)

Manufacturer: PMC Oceanstate
 Website: www.oceanstatelighting.com
 Applicable Model Numbers: 6LE-PO
 Date: March 2009

Fixture Manufacturer's Description

Type of Fixture: Downlight
 Operating Voltage: 120V / 277V
 Control Types: 3 Wire/ EcoSystem
 Dimming Range: 100% - 1%
 Input Current (max.): 0.27 A (120V) / 0.13 A (277V)

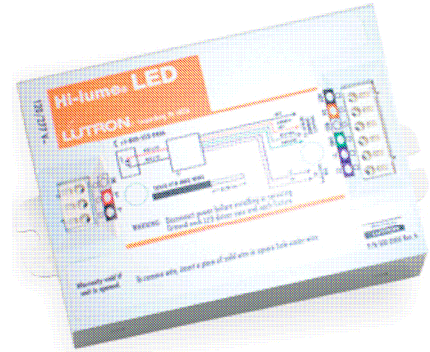

Driver Manufacturer: Lutron Electronics
 Product: Hi-Lume LED Driver

Compatible Lutron Products

Product	Part Number	Fixtures per Dimmer		Measured Light Output Range
		120V	277V	
NovaT	NTF-10,	1-59	-	100% - 1%
NovaT	NTF-103P, NTF-10-277	1-29	1-61	100% - 1%
NovaT	NTF-103P-277	-	1-46	100% - 1%
Nova	NF-10	1-59	-	100% - 1%
Nova	NF-103P, NF-10-277	1-29	1-61	100% - 1%
Nova	NF-103P-277	-	1-46	100% - 1%
Vareo	VF-10	1-29	-	100% - 1%
Skylark	SF-10P, SF-103P	1-29	-	100% - 1%
Skylark	SF-12P-277, SF-12P-277-3	-	1-46	100% - 1%
Diva	DVF-103, DVSCF-103P	1-29	-	100% - 1%
Diva	DVF-103P-277, DVSCF-103P-277	-	1-46	100% - 1%
Ariadni	AYF-103P	1-29	-	100% - 1%
Ariadni	AYF-103P-277	-	1-46	100% - 1%
Vierti	VTF-6AM	1-22	-	100% - 1%
Maestro	MAF-6AM, MAF-6AM-277, MSCF-6AM, MCSF-6AM-277	1-22	1-46	100% - 1%
Maestro Wireless	MRF2-F6AN-DV	1-22	1-46	100% - 1%
Spacer System	SPSF-6A, SPSF-6A-277, SPSF-6AM, SPSF-6AM-277	1-22	1-46	100% - 1%
Lyneo	LXF-103PL	1-29	-	100% - 1%
Lyneo	LXF-103PL-277	-	1-46	100% - 1%
Interfaces ⁽¹⁾	PHPM-3F	1-59	1-123	100% - 1%
	GRX-FDBI-16A	1-59	-	100% - 1%
EcoSystem	CS-1L-WM, CS-2L-WM, CS-1L-CM, CS-2L-CM, EcoSystem ESN	64 per EcoSystem link		100% - 1%
	Grafik Eye QS with EcoSystem	64 per EcoSystem link		100% - 1%
	Quantum	64 per EcoSystem link		100% - 1%

⁽¹⁾ For use with 3 Wire controls or Commercial Systems, RA Systems or Home Systems applications