



# SPECIFICATION SUBMITTAL

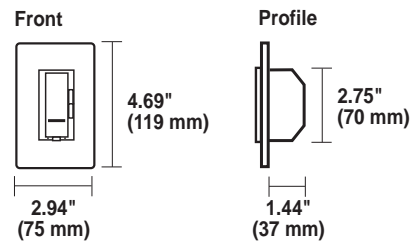


## Personal space light control

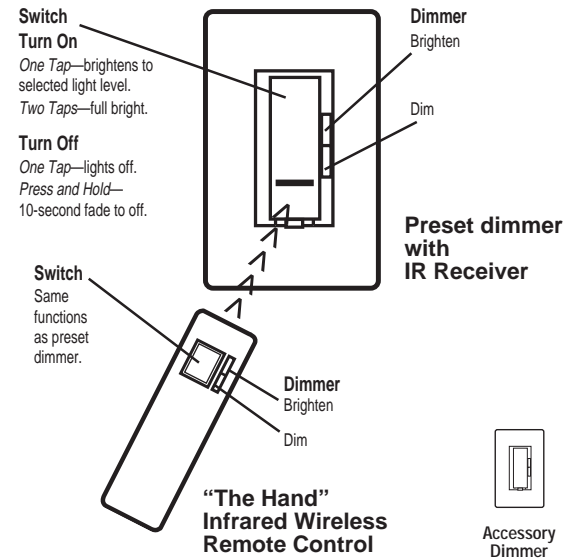

- Dim from your bed, chair . . . or anywhere
- Standard 3-way wiring for easy installation and retrofit (using Accessory Dimmers)
- Full-range dimming possible from up to 10 wall locations
- Fade rates:
  - Lights fade up and down smoothly allowing your eyes to better adjust to changing light levels
  - Ten second fade-to-off (press and hold switch) lets you leave the room before the lights go out

### Multi-Location Dimming (Add up to 9 Accessory Dimmers)

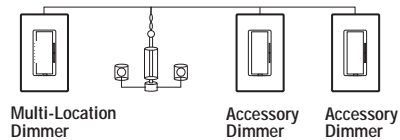

For Multi-Location Dimming:  
 1. First you must install one Multi-Location Dimmer  
 2. Then, you can add up to nine Accessory Dimmers

JOB NAME	AREA CONTROLLED
LOCATION	JOB NUMBER
TITLE	PAGE NO.
SUBMITTED BY	DATE

## PACKAGES

Product	Description	Maximum Capacity	Model #	
<b>Incandescent</b>				
	<b>Preset</b> single-pole dimmer w/IR receiver, infrared wireless remote control & Claro® screwless wallplate	600W	SP-600-HT-	<input type="checkbox"/>
	multi-location dimmer w/IR receiver, infrared wireless remote control accessory dimmer & (2) Claro screwless wallplates	600W	SP-600M-HT-AD-	<input type="checkbox"/>

## INDIVIDUAL COMPONENTS

Product	Description	Maximum Capacity	Model #	
	<b>Dimmers</b> single-pole dimmer w/IR receiver	600W	SP-600-	<input type="checkbox"/>
	multi-location dimmer w/IR receiver	600W	SP-600M-	<input type="checkbox"/>
	<b>Accessory Dimmer</b> use with SP-600M-	-	AD-	<input type="checkbox"/>
	<b>"The Hand" Infrared Wireless Remote Control</b> use with SP-600- or SP-600M-	-	SP-HT-WH	<input type="checkbox"/>

## Hi-POWER 2•4•6. WALLBOX DIMMING SYSTEMS

For control of loads greater than 2000 W/VA, also see brochure (P/N 360-346).

HP-2	2000 W/VA
HP-4	4000 W/VA
HP-6	6000 W/VA

## COLORS

Add appropriate suffix to each model number to order.  
 Example: SP-600-HT-**WH**

White (WH)      Ivory (IV)

"The Hand" Infrared Wireless Remote Control available in white only.

## Designer Series Standard Features

- Power failure memory
  - RFI suppression
- Lutron controls are rated at 120VAC, 60Hz unless otherwise noted.

