


BeveLED® LED

Adjustable 40°



3240



LUMINAIRE INFORMATION

APPLICATION:

Accent luminaire for Residential, Commercial, Retail or Hospitality environments.

MATERIALS:

Trim: Die cast aluminum retained by two mounting clips.

Housing: Fabricated of 20 ga. galvanized steel with 16 ga. galvanized steel thru wire J-box, 4 in 4 out at min. 75°C, #12 AGW thru branch circuit wiring.

Lens Holder: Fabricated of .050 spun aluminum, holds two lens media max.

Heat Sink: Extruded aluminum with black finish. Housing and trim supplied as one complete unit.

LIGHT ENGINE:

20W, 3000K, 85+ CRI. High power warm white LED's attached to extruded aluminum heatsink.

DRIVER:

Solid state electronic. Constant current. High power factor. Specify 120V or 277V.

ADJUSTMENT:

360° horizontal locking, 40° vertical locking

MOUNTING:

Butterfly brackets and adjustable nailer bars with integral nails provided. Nailer bars are extendible from 14" to 24" centers.

CEILING CUT OUT:

5" Ø

LISTINGS:

Dry/damp




IBEW union made.

NOTES:

- Housing included with trim.
- Maximum ceiling thickness 1 inch. Consult factory for other ceiling conditions.
- Fixture should be installed in applications where ambient temperatures do not exceed 40°C during normal operation.
- **5 year warranty**

PHOTOMETRICS:

Distribution chart




LTL No.: 17112.ies
Tested in accordance with IESNA LM-79 standards

HOUSING INFORMATION

New Construction

LRT940N1-NC

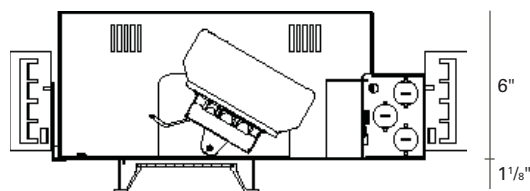

ORDERING INFORMATION

Trim	– Finish	– Housing	– Voltage	– Accessories
3240	10 - White	LRT940N1-NC - New Construction	120V	CB27 - 27" C-Channel Bars
BeveLED Trim	21 - Black		277V	CB52 - 52" C-Channel Bars
Adjustable 40°,	28 - Metalized Grey			DIML1 - Lutron Hi-Lume/ECO SYS Dimming Driver
Warm White LED's				DIML2 - 0-10V Low Voltage Dimming Module
				EML - Emergency lighting battery pack w/ remote test switch

How to Specify

3240	–	–	–	–
Trim	–	–	–	–
	–	–	–	–
	–	–	–	–

USAI®

USA Illumination™
www.usaillumination.com
info@usaillumination.com

1126 River Road
New Windsor, NY 12553

T 845-565-8500
F 845-561-1130

©2009, USAI, LLC.
All rights reserved.
All designs protected by copyright.