

Using an Auxiliary Power Supply to Power Lutron® Clear Connect® RF Keypads

Lutron® Clear Connect® RF Keypads can be powered through IEC/PELV NEC® Class 2 wiring. This is useful in applications where there is existing IEC/PELV NEC® Class 2 wiring in the wallbox, but no high voltage wire.

Requirements


- Sola/Hevi-Duty power supply SDP 1-48-100T (see **Contact Information** on page 2)
- Lutron® Clear Connect® RF Keypads

Specifications

Lutron® Clear Connect® RF Keypad limitations per wire gauge and distance using one (1) SDP 1-48-100T power supply:

Wire Gauge AWG (mm ²)	Wire Run Length ft (m)	Maximum Number of Lutron® Clear Connect® RF Keypads
12 to 18 (2.5 to 0.75)	0 to 900 (0 to 274)	20
20 (0.50)	0 to 600 (0 to 183)	20
20 (0.50)	601 to 900 (183 to 274)	16
22 (0.50)	0 to 300 (0 to 91)	20
22 (0.50)	301 to 600 (92 to 183)	15
22 (0.50)	601 to 900 (183 to 274)	10
24 (0.25)	0 to 300 (0 to 91)	19
24 (0.25)	301 to 600 (92 to 183)	9
24 (0.25)	601 to 900 (183 to 274)	6

Wiring Diagram

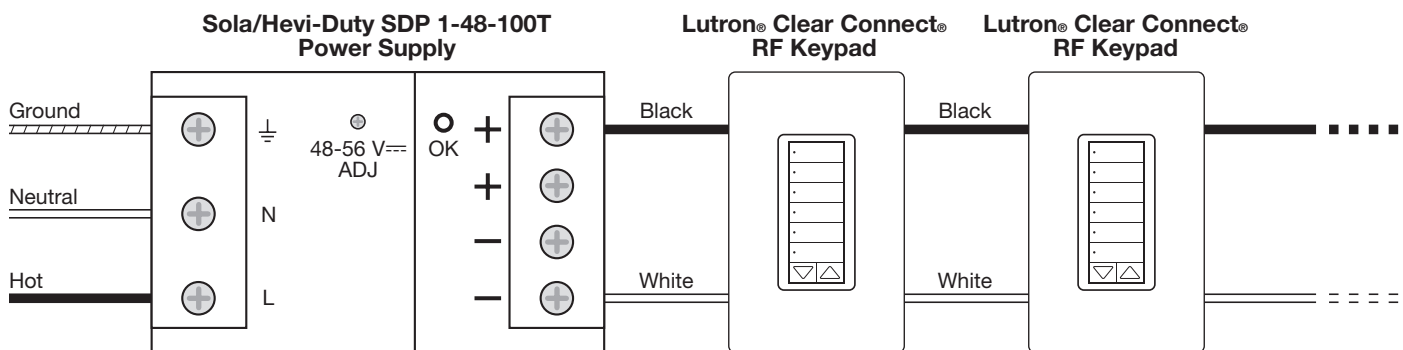

Installation

 **WARNING – Shock Hazard** – To avoid the risk of electric shock, locate and remove the fuse or lock the circuit breaker in the OFF position before proceeding. Wiring with power ON could result in serious injury or death.

1. Remove the fuse or lock the circuit breaker in the OFF position.
2. Install the SDP 1-48-100T power supply in accordance with the manufacturer's instructions.
3. Wire the **black** wires of the Lutron® Clear Connect® Keypads to the "+" terminal of the SDP 1-48-100T power supply.
4. Wire the **white** wires of the Lutron® Clear Connect® Keypads to the "-" terminal of the SDP 1-48-100T power supply.
5. Turn on the breaker to the SDP 1-48-100T power supply.
6. Ensure that the "OK" LED is lit on the SDP 1-48-100T power supply.
7. On the SDP 1-48-100T power supply, turn the 48–56 V ADJ screw clockwise to the maximum output voltage.
8. Check all attached keypads to ensure that they are powered.

Contact Information

Sola/Hevi-Duty, Inc.

EGS Electrical Group
Sola/Hevi-Duty
9377 W. Higgins Rd.
Rosemont, IL 60018, U.S.A.

Tel: +1.877.999.7652
Fax: +1.800.367.4384

Web: www.solaheviduty.com
Sales Email: sales@sola-hevi-duty.com
Technical Support Email: tech@sola-hevi-duty.com

Lutron Contact Information

WORLD HEADQUARTERS

USA

Lutron Electronics Co., Inc.
7200 Suter Road
Coopersburg, PA 18036-1299

TEL: +1.610.282.3800
FAX: +1.610.282.1243
Toll-Free: 1.888.LUTRON1

Technical Support: 1.800.523.9466
intsales@lutron.com

North & South America Technical Hotlines

USA, Canada, Caribbean: 1.800.523.9466
Mexico: +1.888.235.2910
Central/South America: +1.610.282.6701

EUROPEAN HEADQUARTERS

United Kingdom

Lutron EA Ltd.
6 Sovereign Close
London, E1W 3JF United Kingdom

TEL: +44.(0)20.7702.0657
FAX: +44.(0)20.7480.6899
FREEPHONE (UK): 0800.282.107

Technical Support: +44.(0)20.7680.4481
lutronlondon@lutron.com

ASIAN HEADQUARTERS

Singapore

Lutron GL Ltd.
15 Hoe Chiang Road
#07-03, Tower 15
Singapore 089316

TEL: +65.6220.4666
FAX: +65.6220.4333

Technical Support: 800.120.4491
lutronsea@lutron.com

Asia Technical Hotlines

Northern China: 10.800.712.1536
Southern China: 10.800.120.1536
Hong Kong: 800.901.849
Indonesia: 001.803.011.3994
Japan: +81.3.5575.8411
Macau: 0800.401
Taiwan: 00.801.137.737
Thailand: 001.800.120.665853
Other Countries: +65.6220.4666

Lutron and Clear Connect are registered trademarks of Lutron Electronics Co., Inc.
NEC is a registered trademark of the National Fire Protection Association, Quincy, Massachusetts.