

# Finiré Prime

Premium LED Recessed Lighting by Ivalo



## Lutron quick-ship fixture solution

- Guaranteed Lutron control compatibility
- Standard Lutron 1% dimming driver with Soft-on, Fade-to-Black options
- EcoSystem option digitally allows individual fixture control
- Shallow ceiling options
- 5-year limited warranty

 **LUTRON**  
IVALO COLLECTION

# Features and benefits

## The Ivalo Difference



Guaranteed compatibility with Lutron controls



Standard Lutron driver with EcoSystem Soft-on, Fade-to-Black option



Energy Star and CA Title 24 compliant options



LED Control Center of Excellence and 24/7 technical support

## Why Choose Finiré Prime?



Low profile Shallow IC and Non-IC housings



5-year limited Lutron warranty




Quick-ship stocked solutions



High LED color quality



Consistent color from fixture-to-fixture



Up to 1000 lumens delivered

# Finiré Prime Specifications

## LED Performance

	IC & Non-IC	Shallow IC
<b>CRI</b>	90+, R9=65 typical	
<b>Lumens (Delivered)</b>	1000	850
<b>Wattage</b>	14	13
<b>Efficacy (Lumens/Watt)</b>	71	65

## Fixture Dimensions

<b>Trim</b>	5.0" W
<b>Aperture</b>	3.0" W
<b>Non-IC Housing</b>	10.5" L x 7.8" W x 3.5" H
<b>IC Housing</b>	18.9" L x 9.5" W x 6.0" H
<b>Shallow IC Housing</b>	18.9" L x 9.5" W x 3.9" H
<b>Max Ceiling Thickness</b>	up to 5/8"

*Independent measurement of typical 3000K downlight fixture models by Lutron Electronics Co., Inc. for reference only. See the Finiré Prime specification sheets for LM79 photometric data by fixture type and trim options.*

## Fixture Types & Options

Securely clips into ceiling without additional hardware


30° and 65° beam spreads

Tilts up to 25°

Round or square trim in Matte White

2700K and 3000 K, 90+ CRI LED

High Efficiency Frosted Lens

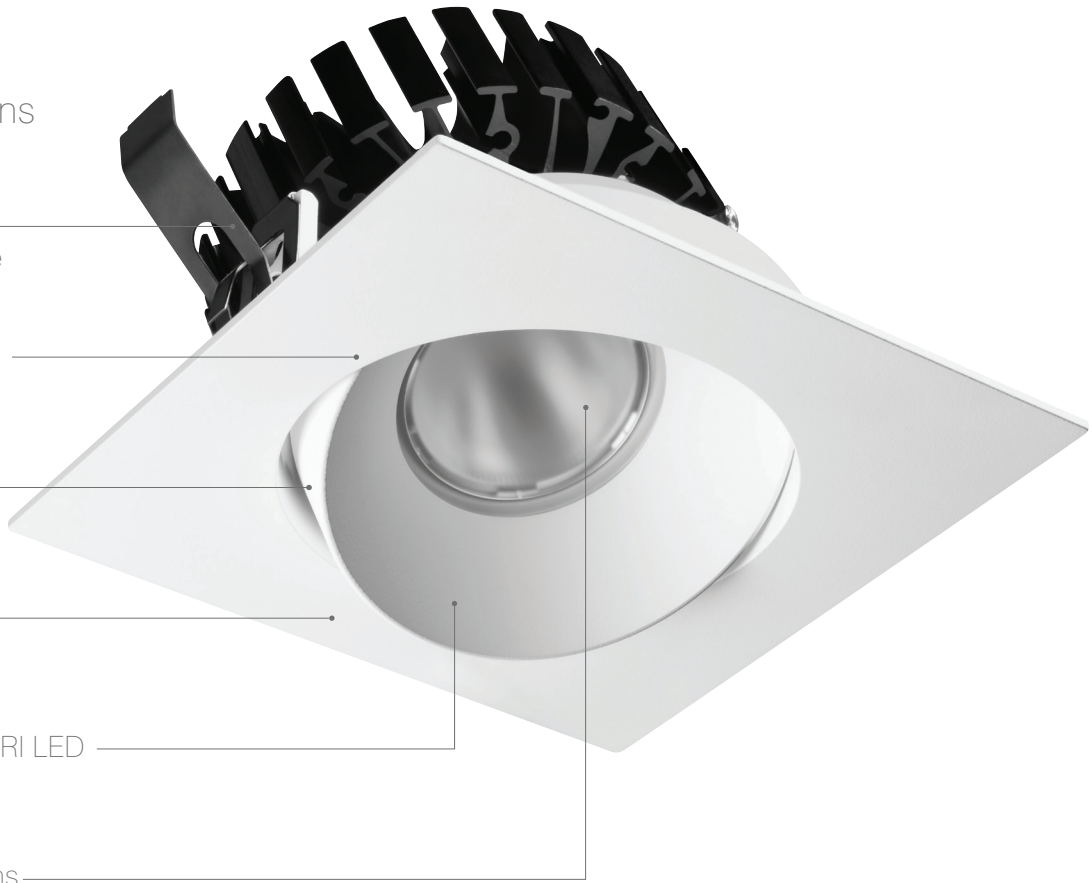

## Compatible Controls

For a list of compatible controls, visit [lutron.com/finire](http://lutron.com/finire) or contact the LED Control Center of Excellence at [leds@lutron.com](mailto:leds@lutron.com)/1.877.DIM.LED8.

# How to specify Finiré Prime LED Recessed Lighting

## You can specify Finiré Prime in 4 easy steps

### Trim (includes LED module)

- 1 Do you like round or square?
- 2 How warm would you like your light?
- 3 Which beam spread is needed?

FPAT R 27X 30 MW

**1 Family**  
FPAT = Finiré Prime, Adjustable, Trimmed  
FPDT = Finiré Prime Wet Location, Downlight, Trimmed

**2 Shape**  
R = Round  
S = Square

**3 LED Type**  
27X = 2700K, 90+CRI  
30X = 3000K, 90+CRI

**4 Beam Spread**  
30 = 30°  
65 = 65°

**Finish**  
MW = Matte White trim

### Housing

- 1 Does your ceiling use insulation?
- 2 Which control type is needed?

FPH NX F1

**Family**  
FPH = Finiré Prime Housing

**1 Housing Type**  
NX = Non-insulation Contact (Non-IC), 14W, 1000 lumens  
IX = Insulation Contact (IC), 14W, 1000 lumens  
IS = Shallow IC 13W, 850 lumens

**2 Control Type**  
F1 = 2-wire, 120V  
EU = EcoSystem, 120/277 V

### Accessory Kits

MODEL NUMBER	DESCRIPTION
FPTC075	Thick Ceiling Clips (0.625 to 0.75 in), 6 sets
FPTC100	Thick Ceiling Clips (0.75 to 1.0 in), 6 sets
FPTC125	Thick Ceiling Clips (1.0 to 1.25 in), 6 sets
FPTC150	Thick Ceiling Clips (1.25 to 1.5 in), 6 sets
FPOPTIC30	Optic Kit (30° reflector and Wall Wash film), 6 pcs
FPOPTIC65	Optic Kit (65° reflector and Wall Wash film), 6 pcs

Need quote, layout, or custom assistance? Email [fixtures@lutron.com](mailto:fixtures@lutron.com) or call 610.282.7472.

For details on Energy Star or CEC Title 24 compliant options, please contact [fixtures@lutron.com](mailto:fixtures@lutron.com).



[lutron.com/ivalo](http://lutron.com/ivalo)

Lutron Electronics Co., Inc.  
7200 Suter Road  
Coopersburg, PA 18036-1299

Customer Service and 24/7 Technical Support:  
610.282.7472 or [fixtures@lutron.com](mailto:fixtures@lutron.com)

© 01/2019 Lutron Electronics Co., Inc.  
Printed in the U.S.A.  
P/N 367-2714 REV E



The Lutron logo, the Sunburst logo, Lutron, Finiré, and EcoSystem are trademarks or registered trademarks of Lutron Electronics Co., Inc., in the U.S. and/or other countries.

Soft-on, Fade-to-Black is a trademark of Lutron Electronics Co., Inc.