
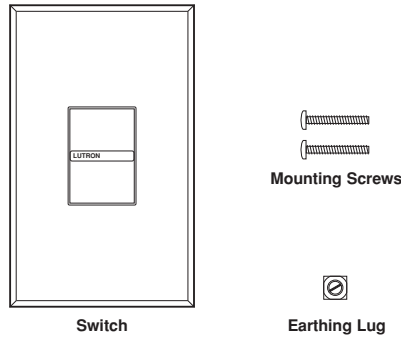


Package Contents



Important Notes - Please Read Before Installation

Install in accordance with all national and local electrical codes.

Multigang Installations: In multigang installations several Nova T  controls are grouped horizontally in one ganging wallbox or in a series of connected wallboxes. Multigang wallplates are available from Lutron to simplify and beautify these installations. If you are planning a multigang installation, read ganging information before beginning installation.


Cleaning Instructions

To clean, wipe with a clean damp cloth. **DO NOT** use any chemical cleaning solutions.

Installation


1. Turn power OFF at circuit breaker or fusebox. Wiring with power on may cause injury or damage switch. Warranty void if switch is miswired.
2. Remove wallplate from switch to prevent damage and to access mounting holes. Pull from top of wallplate to remove. Set aside.
3. Connect wallbox leads to switch. See Figure A or B for wiring diagram. If an earth ground wire is not in the wallbox, contact a licensed electrician.

Figure B. Wiring Diagram - 2-Way

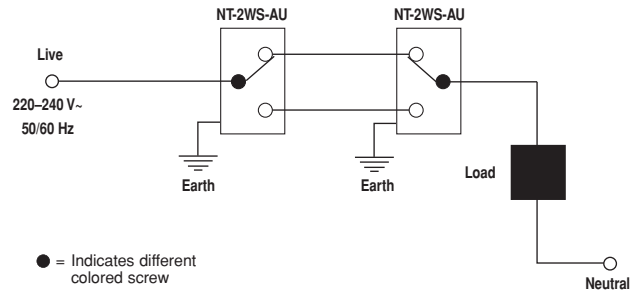


4. Push wires into wallbox, allowing room for switch to be inserted. Do not pinch wires between wallbox and switch.
5. Mount switch to wallbox using screws provided. Switch must be mounted vertically. See Figure C.

Figure C. Mounting Diagram

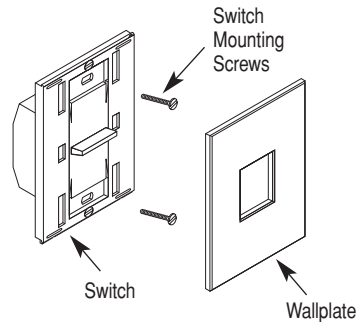

6. Replace wallplate by snapping it back on to the dimmer.
7. Turn on power.

Figure A. Wiring Diagram - Single-Pole

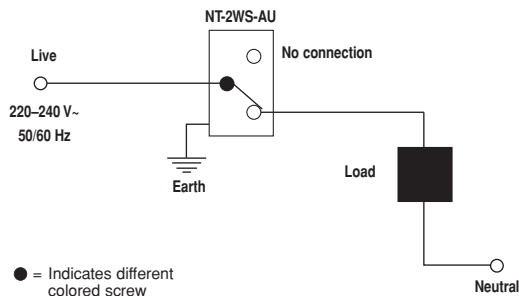

Ganging


Nova T[☆] switches can be installed in a common gangable wall-box or a series of interconnected wallboxes for a clean, consolidated appearance. Controls must be ganged without removing side sections.

When ganging any combination of small and large controls, place all small controls at one end of gang, all large controls at other end. The NT-2WS-AU is a small control.

Table A. Wallbox Requirement Chart

		Number of Small Controls						
		0	1	2	3	4	5	6
Number of Large Controls	0	0	1	1+1*	4	4+1*	7	7+1*
	1	1	3	5	6	8	9	11
	2	4	6	7	9	10	12	13
	3	6	8	10	11	13	14	16
	4	9	11	12	14	15	17	18

* **Note:** When ganging an even number of small controls without removing side sections, you need an additional wallbox. Use a chase nipple as a spacer. See figure below.

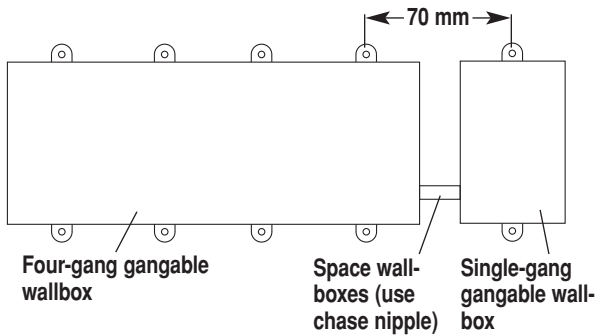

Worldwide Technical and Sales Assistance

If you have questions concerning the installation or operation of this product, call the **Lutron Technical Support Center**. Please provide exact model number when calling.

World Headquarters

Lutron Electronics Co., Inc.
 (800) 523-9466 (U.S.A., Canada, and the Caribbean)
 Tel: +1-610-282-3800
 Fax: +1-610-282-3090

European Headquarters

Lutron EA LTD
 FREEPHONE: 0800 282107 (U.K.)
 Tel: +44 (0) 207 702 0657
 Fax: +44 (0) 207 480 6899
 Visit our web site at www.lutron.com

Limited Warranty

Lutron will, at its option, repair or replace any unit that is defective in materials or manufacture within one year after purchase. For warranty service, return unit to place of purchase or mail to Lutron at 7200 Suter Rd., Coopersburg, PA 18036-1299, postage pre-paid.

THIS WARRANTY IS IN LIEU OF ALL OTHER EXPRESS WARRANTIES, AND THE IMPLIED WARRANTY OF MERCHANTABILITY IS LIMITED TO ONE YEAR FROM PURCHASE. THIS WARRANTY DOES NOT COVER THE COST OF INSTALLATION, REMOVAL OR REINSTALLATION, OR DAMAGE RESULTING FROM MISUSE, ABUSE, OR DAMAGE FROM IMPROPER WIRING OR INSTALLATION. THIS WARRANTY DOES NOT COVER INCIDENTAL OR CONSEQUENTIAL DAMAGES. LUTRON'S LIABILITY ON ANY CLAIM FOR DAMAGES ARISING OUT OF OR IN CONNECTION WITH THE MANUFACTURE, SALE, INSTALLATION, DELIVERY, OR USE OF THE UNIT SHALL NEVER EXCEED THE PURCHASE PRICE OF THE UNIT.

This warranty gives you specific legal rights, and you may have other rights which vary from state to state. Some states do not allow the exclusion or limitation of incidental or consequential damages, or limitation on how long an implied warranty may last, so the above limitations may not apply to you.

LUTRON®

Lutron Electronics Co., Inc.
 7200 Suter Road
 Coopersburg, PA 18036-1299
 Made and printed in U.S.A. 12/04 P/N 030-301 Rev. B