


Aurora™ Preset Control

Operating Instructions

Please Leave for Occupant

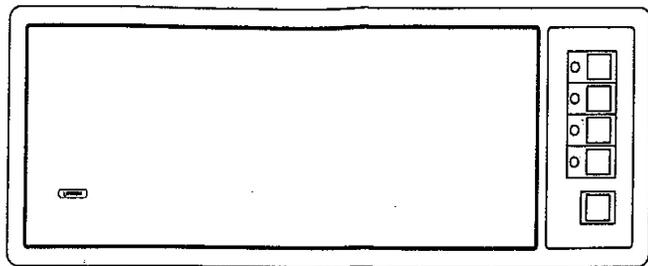

Description

The Aurora Preset Control Center provides management of four different lighting “scenes”. After “scenes” are established, each can be recalled at the touch of a button. The fade time between “scenes” is adjustable from 1 to 60 seconds. The lighting “scenes” can also be adjusted at any time by simply moving the sliders on the Aurora Control Center.

Operation

To turn the lights ON:

Press any of the scene select buttons. The lights will turn ON to the preset scene setting immediately.

To choose any of the other preset scenes:

Simply press the appropriate scene select button. The lights will fade to the preset scene.

To turn the lights OFF:

Press the bottom button. The lights will go off immediately.

If at any time readjustments are necessary:

Follow the “Presetting Scenes” instructions to the right.


Worldwide Technical Assistance

If you need assistance, call the toll-free Lutron Hotline:
800.523.9466

Lutron Electronics
7200 Suter Road
Coopersburg, PA 18036-1299

Presetting Scenes

1. Open the Aurora control by inserting the tip of a pen or similar device into the small latch located on the top of the unit (see figure below).

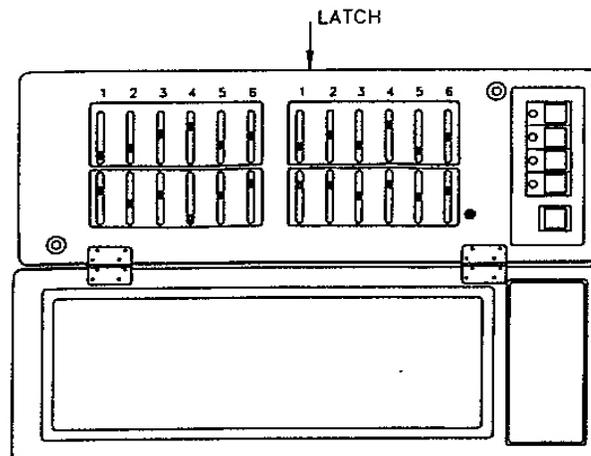


2. Push the scene 1 select push-button. The green LED scene indicator and the sliders LED for scene 1 should light.

3. Adjust the slider LEDs to the desired lighting levels for each zone. This presets scene 1.

4. Repeat steps 2 and 3 for scenes 2, 3, and 4.

There will be a fade (approximately 10 seconds) between scenes as you press the scene select button. Wait for the fade.

5. Adjust the fade time. This is the time it takes the lights to go from one scene to another. The time is factory set to 10 seconds but it can be set between 1 and 60 seconds using the screwdriver provided by Lutron. To increase the fade time, turn the screw clockwise; to decrease the fade time, turn the screw counterclockwise.

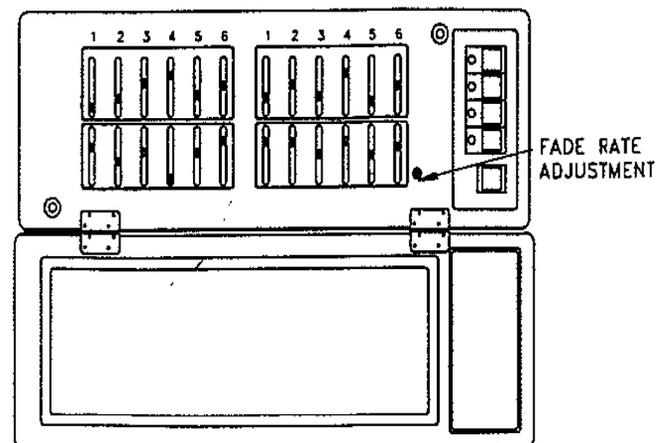

6. After presetting the scenes and adjusting the fade time, close the Aurora control cover.