


RadioTouch Large Button Wallbox Switch Transmitter

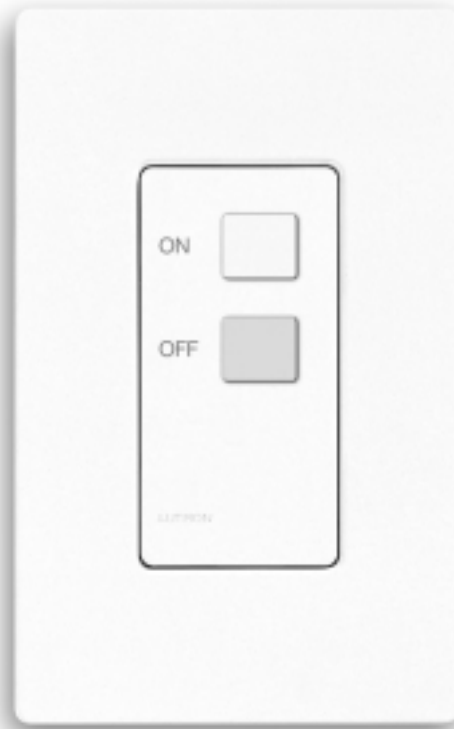

DESCRIPTION


The Large Button Wallbox Switch Transmitter is designed to work in conjunction with the RadioTouch Switchpack. The Transmitter provides on/off functionality. The Transmitter does not require that any wires be connected from the Transmitter to the RadioTouch Switchpack. The Transmitter can be used to control one or more RadioTouch lighting zones.

The Transmitter can also be used for multi-location switching applications. Each Transmitter has a unique address and can be assigned to any RadioTouch Switchpack in the room that is within 35 feet of the Transmitter's location. The Transmitter can be easily configured for multi-gang installations without any need to de-rate the power capacity of the lighting zone being switched.

<p>JOB NAME:</p> <p>JOB NUMBER:</p>	<p>MODEL NUMBERS:</p>
--	------------------------------

Product Dimensions:

- A: 2.93" (74.4mm)
- B: 4.69" (119.1mm)
- C: 0.30" (7.5mm)
- D: 1.37" (34.8mm)
- E: 2.75" (70.0mm)

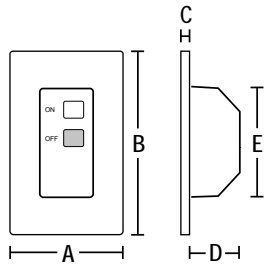

Model:

RTA-WX-2BSW-WH

Colors:

White (WH)

Features:

- Provides on/off functionality for one or more RadioTouch Switchpack Controllers.
- Operates at 120 or 277V line voltage.
- Each Transmitter is uniquely addressed from the factory.
- Each Transmitter can have its address added to any RadioTouch Switchpack mounted within 35 feet of the Switch Style Transmitter.
- Provides multi-location switching by simply adding more Transmitters into the room.
- Communicates with RadioTouch Controllers via radio frequency at 418 mhz.
- Does not require any wires to the RadioTouch Switchpack that is being controlled.
- Allows for multi-gangging of Transmitters without any de-rating of the lighting circuit.

<p>JOB NAME:</p> <p>JOB NUMBER:</p>	<p>MODEL NUMBERS:</p>
--	------------------------------